


110420

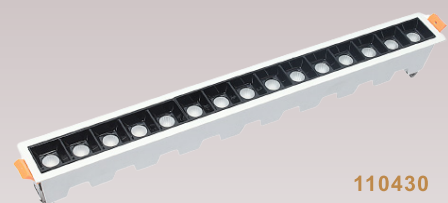

110430

Description

Housing - Die cast aluminium powder coated with choice of RAL colors. radiation protection, UV with high mechanical resistance.

Diffuser - Special PMMA Lens diffuser. UV stabilized with a better light output.

Mounting - LED Recessed mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective

The high definition optics, meticulously studied and made of metallised highly resistant thermoplastic material, and the integrated black anti-glare screen are the warranty of a really professional light effect: pure, uniform and highly visual comfortable. Suitable in false ceiling, with the body in die cast aluminium which gives to the product that look of tough and professional at the same time, the luminaire is pure efficiency.

Completely dustproof.

Protected against jets of water.

Obiettivo




Le ottiche ad alta definizione, meticolosamente studiate e realizzate in materiale termoplastico altamente resistente metallizzato, e lo schermo antiriflesso nero integrato sono la garanzia di un effetto luce davvero professionale: puro, uniforme e molto confortevole. Adatto al controsoffitto, con il corpo in alluminio pressofuso che conferisce al prodotto un aspetto dall'aspetto tenace e professionale allo stesso tempo, l'apparecchio d'illuminazione è di pura efficienza. Completamente antipolvere.

Protetto contro i getti d'acqua.



CODE	POWER	CHIP	IP	LUMENS	DIMENSION
------	-------	------	----	--------	-----------

	110420	10*2W	SMD	54	90 lm/W	280 x 45 x 48mm  273 x 37mm
	110430	15*2W	SMD	54	90 lm/W	413 x 45 x 48mm  406 x 37mm

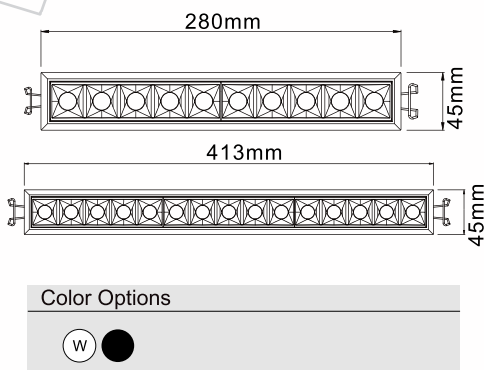

2700K
3000K
4000K
5000K
6000K

DALI
1-10 Dimming
Phase Dimming