




110502



110603



110704

Description

Housing - Die cast aluminium powder coated with choice of RAL colors. radiation protection, UV with high mechanical resistance.

Diffuser- Tempered glass lens diffuser, UV stabilized with a better light output.

Mounting - LED Recessed mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).


Objective

Available in a choice of options in a matter of design and power, plus the chance to more than easily replace the LED source with another one, same or different it will be. This item is pure functionality and adaptable to every requirement. The high efficiency of the LED source ensures excellent performances and low consumptions. Energy and economy savings are a little advantage compared to the design of this item. Completely dustproof. Protected against jets of water.

Obbiettivo

Disponibile in una vasta gamma di opzioni in termini di design e potenza, oltre alla possibilità di sostituire più facilmente la sorgente LED con un'altra, uguale o diversa. Questo articolo è pura funzionalità e adattabile ad ogni esigenza. L'elevata efficienza della sorgente LED garantisce prestazioni eccellenti e bassi consumi. Risparmio energetico ed economico sono un piccolo vantaggio rispetto al design di questo prodotto. Completamente antipolvere. Protetto contro i getti d'acqua.

	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
	110502	2.2W	COB	54	70 lm/W	Ø25 x H60mm Ø20mm
	110603	3.2W	COB	54	70 lm/W	Ø32 x H60mm Ø25mm
	110704	4.2W	COB	54	70 lm/W	Ø35 x H24mm Ø30mm

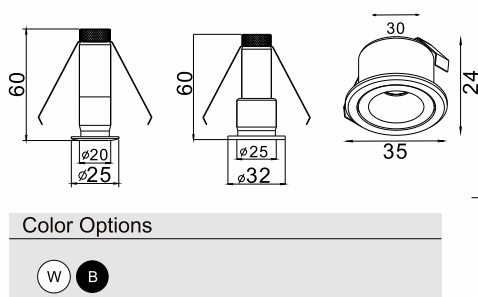

Beam Angle

