



112310 / 15

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Tempered glass diffuser, UV stabilized with a better light output.

Mounting - LED Recessed mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective

This luminaire deliver high lighting performance and excellent visual comfort, without forgetting about energy saving and green requirements. A complete, flexible product range, which is extremely versatile in its various applications. This type of luminaire is studied to win the challenge of high lighting performance criteria in every place. LED energy consumption savings with durability and luminaire with efficiency. Completely dustproof. Protected against jets of water.

Obbiettivo


Questo apparecchio di illuminazione offre alte prestazioni di illuminazione e un eccellente comfort visivo, senza dimenticare il risparmio energetico e le esigenze ecologiche. Una gamma di prodotti completa e flessibile, estremamente versatile nelle sue varie applicazioni. Questo tipo di apparecchio è studiato per vincere la sfida dei criteri di alta illuminazione in ogni luogo. Risparmio sui consumi energetici a LED con durata e apparecchi con efficienza. Completamente antipolvere. Protetto contro i getti d'acqua.





	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
--	------	-------	------	----	--------	-----------

	112310	10W	COB	54	95 lm/W	Ø70 x 76mm
--	--------	-----	-----	----	---------	------------

	112315	15W	COB	54	95 lm/W	Ø70 x 76mm
--	--------	-----	-----	----	---------	------------



Beam Angle

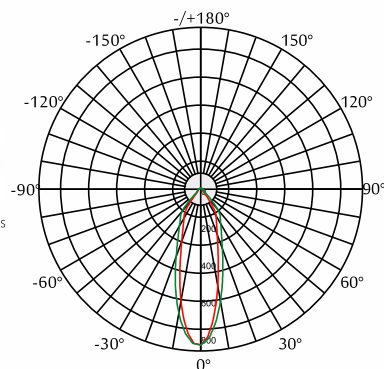

2700K
3000K
4000K
5000K
6000K

DALI
1-10 Dimming
Phase Dimming

Color Options Reflector Options

W B G W B G