



118200



118300

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - PMMA Lens Diffuser, UV stabilized with a better light output.

Mounting - LED Recessed mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective

This good looking downlight guarantees satisfying results. Perfect for work lighting especially in places where a lot of nice and bright light is required. LED energy saving consumptions yet gives a great bright and calm ambience. Protected against the penetration on by solid bodies with dimensions greater than $\varnothing$ 1 mm. Protected against sprays of water.

Obbiettivo

Questo downlight dall'aspetto elegante garantisce risultati soddisfacenti. Perfetto per l'illuminazione di lavoro, specialmente in luoghi dove è richiesta molta luce piacevole e brillante. I consumi energetici a LED offrono ancora un ambiente luminoso e calmo. Protegge contro la penetrazione di corpi solidi di dimensioni superiori a $\varnothing$ 1 mm. Protegge contro gli spruzzi d'acqua.



CODE	POWER	CHIP	IP	LUMENS	DIMENSION
 118200	8W/12W/18W	COB	44	95 lm/W	Ø80 x 122 x 87mm ☂ Ø85mm
 118300	8W/12W/18W	COB	44	95 lm/W	Ø90 x 87mm ☂ Ø80mm



Color Options



Beam Angle

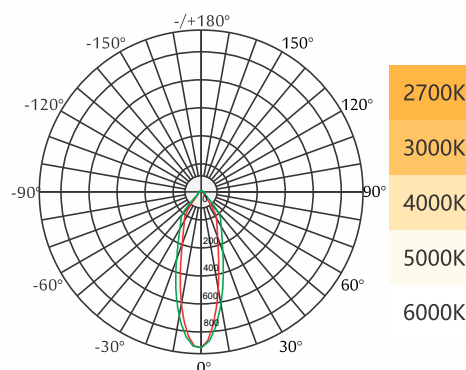

LED



CRI >90

-20° C
55° C

85~265V
50/60Hz

