


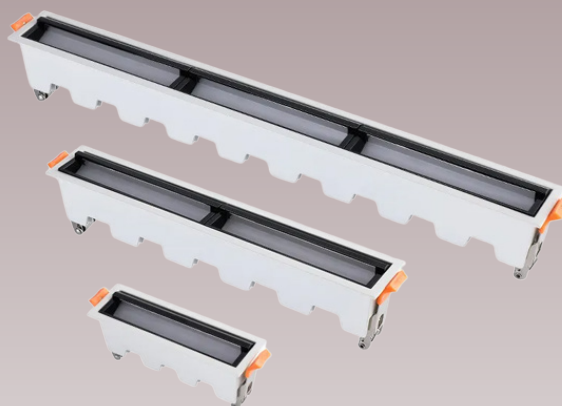

119010 / 20 / 30

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - PMMA Anti Glare diffuser, UV stabilized with a better light output.

Mounting - LED Recessed mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).


Objective

This good looking spotlight guarantees satisfying results. Perfect for work lighting especially in places where a lot of nice and bright light is required. LED energy saving consumptions yet gives a great bright and calm ambience. Protected against the penetration by solid bodies with dimensions greater than $\varnothing$ 1 mm. Protected against splash of water.

Obiettivo

Questo spotlight dall'aspetto elegante garantisce risultati soddisfacenti. Perfetto per l'illuminazione di lavoro, specialmente in luoghi dove è richiesta molta luce piacevole e brillante. I consumi energetici a LED offrono ancora un ambiente luminoso e calmo. Protegge contro la penetrazione di corpi solidi di dimensioni superiori a $\varnothing$ 1 mm. Protetto contro gli spruzzi d'acqua.



	CODE	POWER	CHIP	IP	LUMENS	DIMENSION (L x W x H)
	119010	10W	SMD	44	85lm/W	147 x 45 x 50mm
	119020	20W	SMD	44	85lm/W	279 x 45 x 50mm
	119030	30W	SMD	44	85lm/W	415 x 45 x 50mm

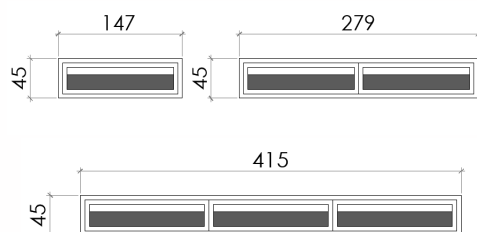

Color Options

W B

Beam Angle

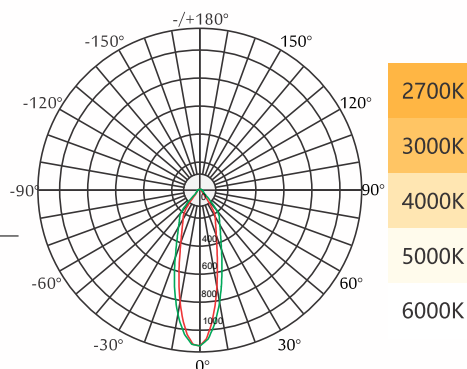

2700K
3000K
4000K
5000K
6000K

DALI
1-10 Dimming
Phase Dimming