



1191005 / 07 / 12 / 18 / 24

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - PMMA diffuser, UV stabilized with a better light output.

Reflector - Aluminium reflector, UV stabilized.

Mounting - LED Recessed mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective


This luminaire is a good choice in matter of design and power. This high efficiency of the LED source ensures excellent performances and low consumptions. Energy and economy savings are a little advantage compared to the design of this item. Completely dustproof. Protected against splash of water.

Obbiettivo

Questo apparecchio è una buona scelta in termini di design e potenza. Questa elevata efficienza della sorgente LED garantisce prestazioni eccellenti e bassi consumi. Risparmio energetico ed economico sono un piccolo vantaggio rispetto al design di questo prodotto.

Completamente antipolvere. Protetto contro gli spruzzi d'acqua.

	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
•	1191005	5W	COB	54	95 lm/W	Ø63 x H82.5mm
	1191007	7W	COB	54	95 lm/W	Ø83 x H96mm
	1191012	12W	COB	54	95 lm/W	Ø83 x H111mm
•	/ 1191018	18W	COB	54	95 lm/W	Ø105 x H120mm 🗣 Ø95mm
•	1191024	24W	COB	54	95 lm/W	Ø105 x H130mm

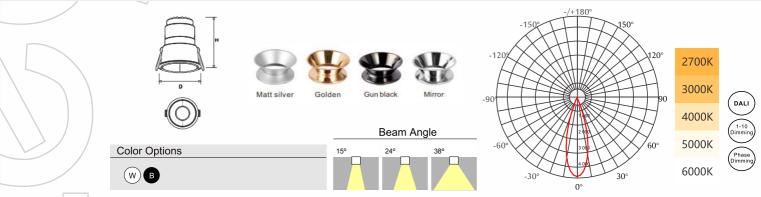





















-20° C 85~265V 55° C 50/60Hz

legg<u>ero</u> PHILIPS TRIDONIC

BRIDGELUX ☐ CREE

