




119405 / 07 / 12 / 24

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - PMMA diffuser with Honeycomb, UV stabilized with a better light output.

Mounting - LED Recessed mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).


Objective

This luminaire is a good choice in matter of design and power. This high efficiency of the LED source ensures excellent performances and low consumptions. Energy and economy savings are a little advantage compared to the design of this item. Completely dustproof. Protected against splash of water.



Obbiettivo

Questo apparecchio è una buona scelta in termini di design e potenza. Questa elevata efficienza della sorgente LED garantisce prestazioni eccellenti e bassi consumi. Risparmio energetico ed economico sono un piccolo vantaggio rispetto al design di questo prodotto. Completamente antipolvere. Protetto contro gli spruzzi d'acqua.

	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
	119405	5W	COB	54	95 lm/W	Ø60 x H38mm Ø55mm
	119407	7W	COB	54	95 lm/W	Ø70 x H36mm Ø65mm
	119412	12W	COB	54	95 lm/W	Ø82 x H40mm Ø75mm
	119420	20W	COB	54	95 lm/W	Ø102 x H46mm Ø95mm



Beam Angle

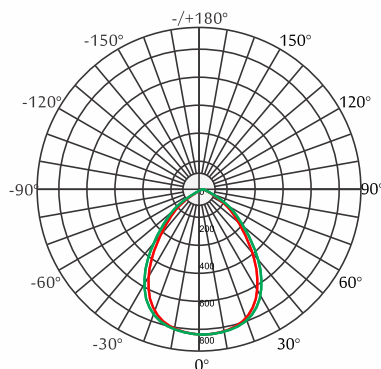

2700K
3000K
4000K
5000K
6000K

DALI
1-10 Dimming
Phase Dimming

Color Options

W B

