




1195300



1195400

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Bulb Lens / PMMA Diffuser, UV stabilized with a better light output.

Mounting - LED Recessed mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).


Objective

This good looking spotlight guarantees satisfying results. Perfect for work lighting especially in places where a lot of nice and bright light is required. LED energy saving consumptions yet gives a great bright and calm ambience. Protected against the penetra on by solid bodies with dimensions greater than Ø 1 mm. It is not protected against liquid penetration.

Obbiettivo

Questo spotlight dall'aspetto elegante garantisce risultati soddisfacenti. Perfetto per l'illuminazione di lavoro, specialmente in luoghi dove è richiesta molta luce piacevole e brillante. I consumi energetici a LED offrono ancora un ambiente luminoso e calmo. Prote o contro la penetrazione di corpi solidi di dimensioni superiori a Ø 1 mm. Non è prote o contro la penetrazione di liquidi.


CODE	POWER	CHIP	IP	LUMENS	DIMENSION
1195300	6W/8W/12W	GU10/Module	20/44	95 lm/W	Ø92 x 38mm ➤ Ø85mm
1195400	6W/8W/12W	GU10/Module	20/44	95 lm/W	92 x 92 x 38mm ➤ Ø85mm

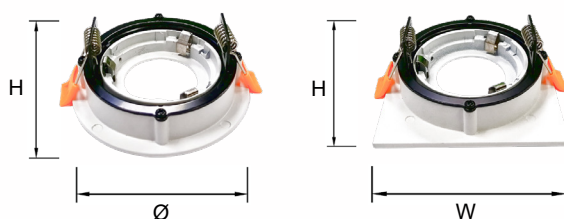

Beam Angle

Color Options

W B

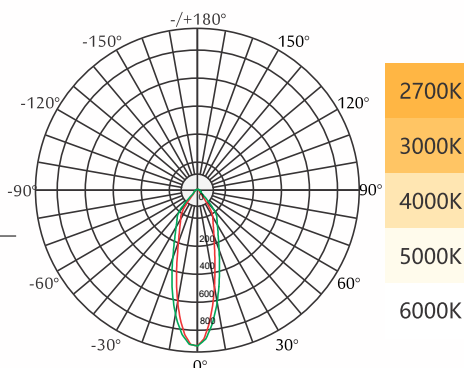

DALI
1-10 Dimming
Phase Dimming

