



121308 / 15 / 20 / 30 / 40

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Tempered glass diffuser, UV stabilized with a better light output.

Reflector - Aluminium reflector, UV stabilized.

Mounting - LED Recessed mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).




Objective

This downlight has a wide choice of wattage. High quality and efficiency fitting made. LED energy saving consumption and high resistance and last long. Due to Innovation and research this downlight is made of advance technologies and guarantees very calm and bright lighting to the environment. Completely dustproof. Protected against splash of water.

Obiettivo

Questo faretto ha una vasta scelta di potenza. Realizzazione di alta qualità ed efficienza. Risparmio energetico a LED, alta resistenza e lunga durata. Grazie all'innovazione e alla ricerca, questo downlight è realizzato con tecnologie avanzate e garantisce un'illuminazione molto calma e luminosa all'ambiente. Completamente antipolvere. Protetto contro gli spruzzi d'acqua.

	CODE	POWER	CHIPS	IP	LUMENS	DIMENSION
	121308	8W	COB	54	95 lm/W	H34 x W84mm
	121315	15W	COB	54	95 lm/W	H42 x W105mm
	121320	20W	COB	54	95 lm/W	H50 x W136mm
	121330	30W	COB	54	95 lm/W	H58 x W162mm
	121340	40W	COB	54	95 lm/W	H66 x W213mm

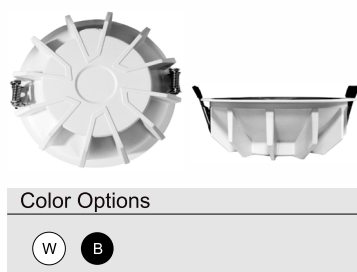

RGB

2700K

3000K

4000K

5000K

