



122410 / 18 / 20 / 30 / 40

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Tempered glass diffuser, UV stabilized with a better light output.

Reflector - Tiles pattern anodized aluminium reflector, UV stabilized.

Mounting - LED Recessed mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).




Objective

This downlight has a wide choice of wattage. High quality and efficiency fitting made. LED energy saving consumption and high resistance and last long. Due to Innovation and research this downlight is made of advance technologies and guarantees very calm and bright lighting to the environment. Completely dustproof. Protected against splash of water.

Obiettivo

Questo faretto ha una vasta scelta di potenza. Realizzazione di alta qualità ed efficienza. Risparmio energetico a LED, alta resistenza e lunga durata. Grazie all'innovazione e alla ricerca, questo downlight è realizzato con tecnologie avanzate e garantisce un'illuminazione molto calma e luminosa all'ambiente. Completamente antipolvere. Protetto contro gli spruzzi d'acqua.

	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
	122410	10W	COB	65	95 lm/W	Ø115 x 48mm ☞ Ø105mm
	122418	18W	COB	65	95 lm/W	Ø145 x 60mm ☞ Ø135mm
	122420	20W	COB	65	95 lm/W	Ø159 x 60mm ☞ Ø150mm
	122430	30W	COB	65	95 lm/W	Ø190 x 60mm ☞ Ø180mm
	122440	40W	COB	65	95 lm/W	Ø230 x 72mm ☞ Ø215mm

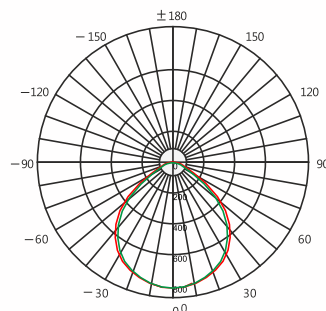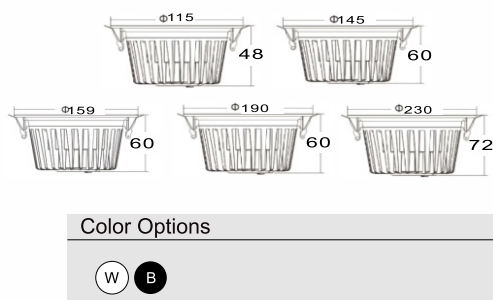

2700K	
3000K	
4000K	
5000K	
6000K	