



122607 / 10 / 13 / 18 / 25 / 35 / 45

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Opal Polycarbonate diffuser, UV stabilized with a better light output.

Mounting - LED Recessed mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).


Objective

High efficiency LED downlight. This fitting gives great functionality and efficiency. The design is consistent. The light provided from this luminaire is uniform and there is no glare effect. Expect LED energy saving consumption and durability. Completely dustproof. Protected against splash of water.

Obiettivo

Downlight LED ad alta efficienza. Questo raccordo offre grande funzionalità ed efficienza. Il design è coerente. La luce fornita da questo apparecchio è uniforme e non vi è alcun effetto di abbagliamento. Aspettatevi consumi e durata a risparmio energetico a LED. Completamente antipolvere. Protetto contro gli spruzzi d'acqua.


	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
	122607	7W	SMD	54	85 lm/W	Ø80 x H39.5mm Ø70mm
	122610	10W	SMD	54	85 lm/W	Ø110 x H38mm Ø90mm
	122613	13W	SMD	54	85 lm/W	Ø145 x H45mm Ø120mm
	122618	18W	SMD	54	85 lm/W	Ø170 x H45mm Ø140mm
	122625	25W	SMD	54	85 lm/W	Ø190 x H45mm Ø160mm
	122635	35W	SMD	54	85 lm/W	Ø228 x H45mm Ø200mm
	122645	45W	SMD	54	85 lm/W	Ø280 x H52mm Ø230mm

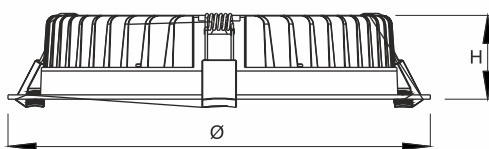

Color Options



Beam Angle



2700K
3000K
4000K
5000K
6000K



LED

