



122805 / 10 / 15

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Tempered glass diffuser, UV stabilized with a better light output.

Reflector - Aluminium reflector, UV stabilized.

Mounting - LED Recessed mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).


Objective

This downlight has a wide choice of wattage. High quality and efficiency fitting made. LED energy saving consumption and high resistance and last long. Due to Innovation and research this downlight is made of advance technologies and guarantees very calm and bright lighting to the environment. Completely dustproof. Protected against splash of water.



Obiettivo

Questo faretto ha una vasta scelta di potenza. Realizzazione di alta qualità ed efficienza. Risparmio energetico a LED, alta resistenza e lunga durata. Grazie all'innovazione e alla ricerca, questo downlight è realizzato con tecnologie avanzate e garantisce un'illuminazione molto calma e luminosa all'ambiente. Completamente antipolvere. Protetto contro gli spruzzi d'acqua.

	CODE	POWER	CHIPS	IP	LUMENS	DIMENSION
	122805	5W	COB	65	95 lm/W	Ø65 x 53mm Ø55mm
	122810	10W	COB	65	95 lm/W	Ø85 x 62mm Ø75mm
	122815	15W	COB	65	95 lm/W	Ø105 x 78mm Ø95mm

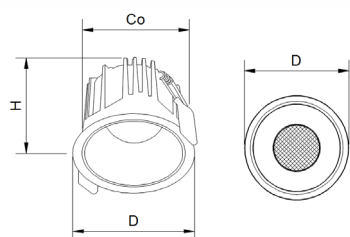

Color Options



2700K
3000K
4000K
5000K
6000K



>90

-20° C
55° C

85~265V
50/60Hz

