



1235105 / 10 / 15

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Tempered glass diffuser, UV stabilized with a better light output.

Reflector - Aluminium reflector, UV stabilized.

Mounting - LED Recessed mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).



Objective

This downlight has a wide choice of wattage. High quality and efficiency fitting made. LED energy saving consumption and high resistance and last long. Due to Innovation and research this downlight is made of advance technologies and guarantees very calm and bright lighting to the environment. Completely dustproof. Protected against splash of water.

Obiettivo


Questo faretto ha una vasta scelta di potenza. Realizzazione di alta qualità ed efficienza. Risparmio energetico a LED, alta resistenza e lunga durata. Grazie all'innovazione e alla ricerca, questo downlight è realizzato con tecnologie avanzate e garantisce un'illuminazione molto calma e luminosa all'ambiente. Completamente antipolvere. Protetto contro gli spruzzi d'acqua.

	CODE	POWER	CHIPS	IP	LUMENS	DIMENSION
	1235105	5W	COB	65	95 lm/W	L65 x W65 x H53mm
	1235110	10W	COB	65	95 lm/W	L85 x W85 x H62mm
	1235115	15W	COB	65	95 lm/W	L105 x W105 x H78mm

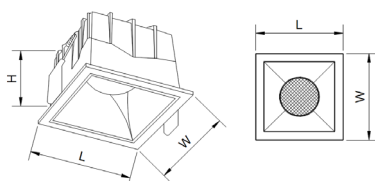

Color Options

W B



2700K
3000K
4000K
5000K
6000K

DALI
1-10 Dimming
Phase Dimming