123707 / 09 / 12 / 18 / 24 / 30 / 40 / 50

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - PC diffuser, Frosted / Clear type, UV stabilized with a better light output.

Reflector - Aluminium reflector, UV stabilized.

Mounting - LED Recessed mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective

This luminaire is a good choice in matter of design and power. This high efficiency of the LED source ensures excellent performances and low consumptions. Energy and economy savings are a little advantage compared to the design of this item.
Completely dustproof.
Protected against jets of water.

Obbiettivo

Questo apparecchio è una buona scelta in termini di design e potenza. Questa elevata efficienza della sorgente LED garantisce prestazioni eccellenti e bassi consumi. Risparmio energetico ed economico sono un piccolo vantaggio rispetto al design di questo prodotto.
Completamente antipolvere.
Prote o contro ge d'acqua.

CODE	POWER	CHIP	IP	LUMENS	DIMENSION
123707	7W	COB	65	95 lm/W	Ø85 x H70mm Ø75mm
123709	9W	COB	65	95 lm/W	Ø110 x H78mm Ø95mm
123712	12W	COB	65	95 lm/W	Ø110 x H78mm Ø95mm
123718	18W	COB	65	95 lm/W	Ø135 x H91mm Ø125mm
123724	24W	COB	65	95 lm/W	Ø135 x H91mm Ø125mm
123730	30W	COB	65	95 lm/W	Ø180 x H106mm Ø155mm
123740	40W	COB	65	95 lm/W	Ø180 x H106mm Ø155mm
123750	50W	COB	65	95 lm/W	Ø242 x H140mm Ø220mm

Color Options

W B

Beam Angle



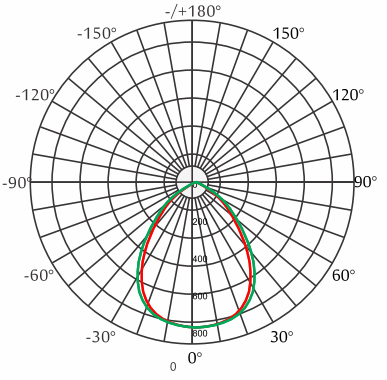

2700K
3000K
4000K
5000K
6000K

DALI
1-10 Dimming
Phase Dimming

RoHS CE UV LED >90 -20° C 55° C 85~265V 50/60Hz Leggero PHILIPS TRIDONIC MEAN WELL BRIDGELUX CREE A++