





1302114



1302214

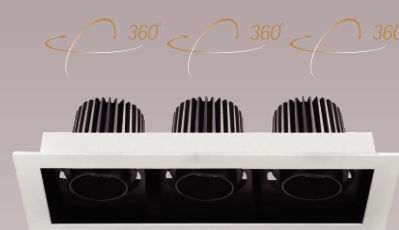

1302314

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Tempered glass diffuser, UV stabilized with a better light output.

Reflector - Aluminium module reflector, UV stabilized.

Mounting - LED Recessed mounted.

Standards - Manufactured and tested as per PTPS IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).



Objective

Since downlight has the advantage of light adjustment they can be installed easily around the edge of the room to get that clean and streamlined light for the perfect ambience. Perfect for areas which required bright light and energy saving consumption at the same time. Completely dustproof. Protected against splash of water.

Obbiettivo

Poiché il downlight ha il vantaggio della regolazione della luce, è possibile installarlo facilmente lungo il bordo della stanza per ottenere una luce pulita e aerodinamica per l'ambiente perfetto. Perfetto per le aree che richiedevano luce intensa e consumo energetico allo stesso tempo. Completamente antipolvere. Protetto contro gli spruzzi d'acqua.

	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
	1302114	1*14W	COB	44	95 lm/W	160 x 160 x 95mm ☞ 143*145mm
	1302214	2*14W	COB	44	95 lm/W	274 x 160 x 95mm ☞ 245*145mm
	1302314	3*14W	COB	44	95 lm/W	395 x 160 x 98mm ☞ 365*145mm

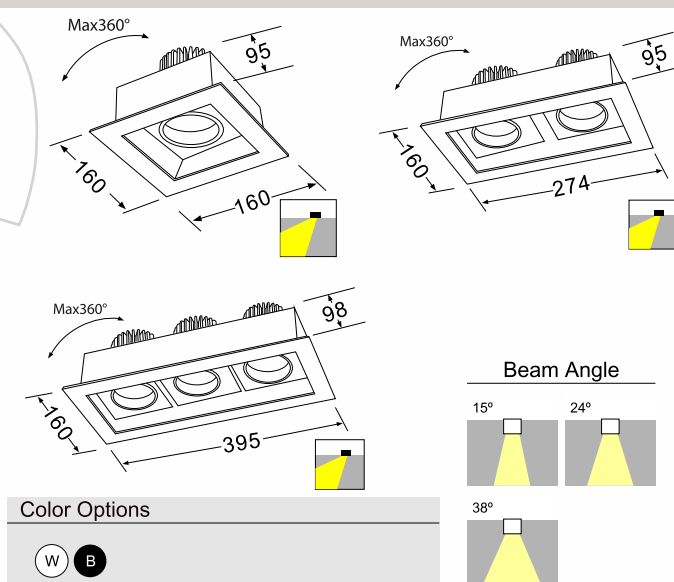

2700K
3000K
4000K
5000K
6000K

DALI
1-10 Dimming
Phase Dimming