



141613

Description

Material - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Polycarbonate Diffuser, UV stabilized with a better light output.

Mounting - LED Surface wall mounted.

Standards - Manufactured and tested as per PTSP IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective

Eco friendly surface luminaire yet will guaranteed you that this product is durable and will last long. Since this is LED light this will surely saves you from a costly consumption of energy. Expected to provide the great results on minimal consumption. Protected against the penetration by solid bodies. Protected against sprays of water.


Obbiettivo

L'apparecchio d'illuminazione di superficie ecologica vi garantirà tuttavia che questo prodotto è durevole e durerà a lungo. Dato che si tratta di una luce a LED, questo ti farà sicuramente risparmiare da un costoso consumo di energia. Previsto per fornire i grandi risultati sul consumo minimo. Protetto contro la penetrazione di corpi solidi. Protetto contro gli spruzzi d'acqua.



CODE	POWER	TYPE	IP	LUMENS	DIMENSION
------	-------	------	----	--------	-----------


 141613	13W	SMD	65	90 lm/W	125 x 50 x 161mm
--	-----	-----	----	---------	------------------

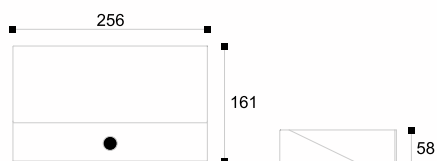

Color Options

SG DG B

Beam Angle



2700K
3000K
4000K
5000K
6000K



IK08

CRI >90

-20° C
55° C

85~265V
50/60Hz

leggero
PHILIPS

LED Chips
BRIDGELUX
CREE

