


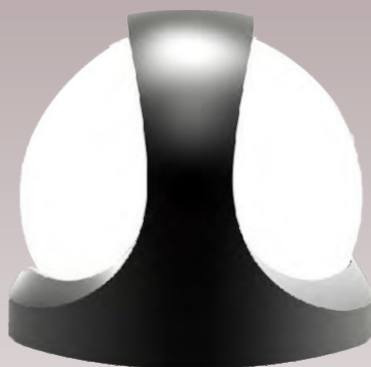

141912

Description

Material - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Polycarbonate diffuser, UV stabilized with a better light output.

Mounting - LED Surface wall mounted.

Standards - Manufactured and tested as per PTSP IEC 62722.


LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective


Provides quality light and energy efficiency. This luminaire can replace the traditional wall mounted luminaires. Suitable to various occasions. Durability is expected. Energy consumption is less yet very good quality. Installing is very easy. Completely dustproof. Protected against jets of water.

Obbiettivo

Fornisce luce di qualità ed efficienza energetica. Questo apparecchio può sostituire i tradizionali apparecchi a parete. Adatto a varie occasioni. È prevista la durabilità. Il consumo di energia è di qualità inferiore ma molto buona. L'installazione è molto semplice. Completamente antipolvere. Protetto contro i getti d'acqua.

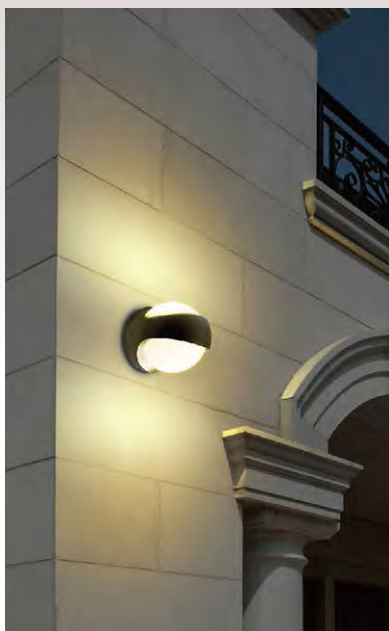


	CODE	POWER	TYPE	IP	LUMENS	DIMENSION
	141912	12W	SMD	65	90 lm/W	200 x 180 x 200mm

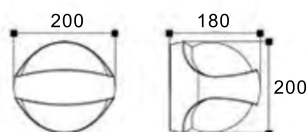

Color Options

SG DG B

Beam Angle



2700K
3000K
4000K
5000K
6000K