



142100

Description

Material - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Tempered glass / Polycarbonate diffuser, UV stabilized with a better light output.

Mounting - LED Surface wall mounted.

Standards - Manufactured and tested as per PTPS IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective

This luminaire is characterized as one of the innovative in the LED technology. Through Innovation and research this luminaire becomes more efficient and durable. It gives pleasant and comfortable to ones eye. LED energy consumption savings.


Protected against the penetration by solid bodies. Protected against sprays of water.

Obbiettivo

Questo apparecchio è caratterizzato come uno degli innovativi nella tecnologia LED. Attraverso l'innovazione e la ricerca, questo apparecchio diventa più efficiente e durevole. Dà piacevole e confortevole per gli occhi. Risparmio sui consumi energetici a LED.

Protetto contro la penetrazione di corpi solidi. Protetto contro gli spruzzi d'acqua.



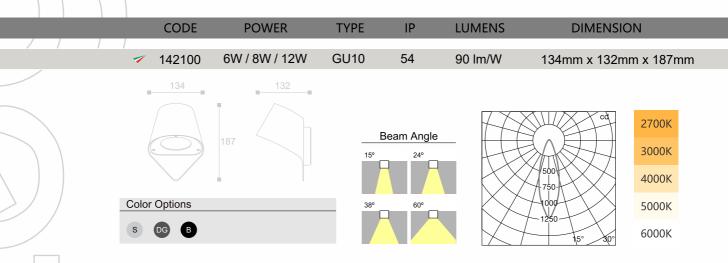



















CRI -20° C >90 55° C

85~265V 50/60Hz

legg<u>ero</u>

BRIDGELU GREE

