



142413

Description

Material - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Polycarbonate diffuser, UV stabilized with a better light output.

Mounting - LED Surface wall mounted.

Standards - Manufactured and tested as per PTSP IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).


Objective

This luminaire is essentially good quality. LED light sources are of the latest generation of LED. Great efficiency and energy saving is expected on this luminaire. Quality raw materials and safety warranty for the electrical system and for the users. Durability and satisfactory is expected. Protected against the penetration by solid bodies. Protected against rain.

Obbiettivo



Questo apparecchio è essenzialmente di buona qualità. Le sorgenti luminose a LED sono di ultima generazione di LED. Grande efficienza e risparmio energetico sono previsti per questo apparecchio. Materie prime di qualità e garanzia di sicurezza per l'impianto elettrico e per gli utenti. Si prevede una durata e soddisfacente. Protetto contro la penetrazione di corpi solidi. Protetto contro gli spruzzi d'acqua.

CODE	POWER	TYPE	IP	LUMENS	DIMENSION
 142413	13W	SMD	65	90 lm/W	223 x 105 x 130mm

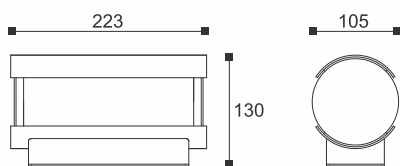

Color Options

SG DG B



2700K
3000K
4000K
5000K
6000K



IK08

CRI > 90

-20° C
55° C

85~265V
50/60Hz

Leggero
PHILIPS

LED Chips
BRIDGELUX
CREE

A++