

142810

Objective

This luminaire's unique design gives a pleasant and warm ambience to one's eye. Due to LED characteristics, this fitting gives more efficiency and durability on itself. LED energy saving consumption is expected. Durability and long lasting quality is expected.

Completely dustproof.
Protected against jets of water.

Obbiettivo

Questo design unico di apparecchi di illuminazione offre un ambiente piacevole e caldo alla vista. Grazie alle caratteristiche del LED, questo apparecchio offre maggiore efficienza e durata su se stesso. Si prevede un consumo di risparmio energetico a LED. Sono previste resistenza e qualità duratura.

Completamente antipolvere.
Protetto contro i getti d'acqua.

Description


Material - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Polycarbonate diffuser, UV stabilized with a better light output.

Mounting - LED Surface wall mounted.

Standards - Manufactured and tested as per PTPS IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

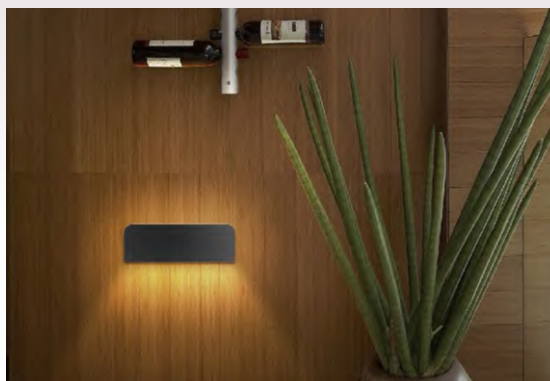

141613 65 65 65 90 lm/W 125 x 50 x 161mm

CODE	POWER	TYPE	IP	LUMENS	DIMENSION
142810	10W	SMD	65	90 lm/W	230 x 80 x 37mm

