



143107 / 12

Description

Material - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Polycarbonate diffuser, UV stabilized with a better light output.

Mounting - LED Surface wall mounted.

Standards - Manufactured and tested as per PTPS IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective


This luminaire feature high quality LED source with low energy consumption. unique design and suitable for many applications. this luminaire is very comfortable to ones eye. durability and efficiency of this item is expected on this luminaire. Completely dustproof. Protected against jets of water.

Obbiettivo

Questo apparecchio è dotato di sorgente LED di alta qualità a basso consumo energetico. design unico e adatto a molte applicazioni. questo apparecchio è molto comodo per gli occhi. la durata e l'efficienza di questo articolo sono attese per questo apparecchio. Completamente antipolvere. Protetto contro i getti d'acqua.




	CODE	POWER	TYPE	IP	LUMENS	DIMENSION
	143107	7W	SMD	65	90 lm/W	160 x 100 x 86mm
	143112	12W	SMD	65	90 lm/W	242 x 149 x 129mm

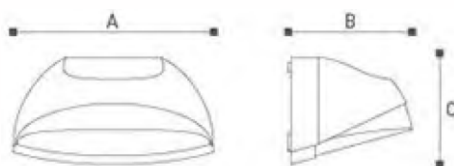

Color Options

SG DG B



2700K
3000K
4000K
5000K
6000K



IK09

CRI >90

-20° C
55° C

85~265V
50/60Hz

leggero
PHILIPS

LED Chips
BRIDGELUX
CREE

