



144203

144207

Objective

This luminaire feature high quality LED source with low energy consumption. unique design and suitable for many applications. this luminaire is very comfortable to ones eye. durability and efficiency of this item is expected on this luminaire. Completely dustproof. Protected against jets of water.

Obbiettivo

Questo apparecchio è dotato di sorgente LED di alta qualità a basso consumo energetico. design unico e adatto a molte applicazioni. questo apparecchio è molto comodo per gli occhi. la durata e l'efficienza di questo articolo sono attese per questo apparecchio. Completamente antipolvere. Protetto contro i getti d'acqua.

Description


Material - Die cast aluminium extruded sections with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Polycarbonate diffuser, UV stabilized with a better light output.

Mounting - LED Surface wall mounted.


Standards - Manufactured and tested as per PTPS IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

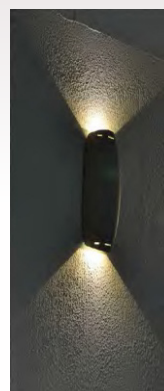

CODE	POWER	TYPE	IP	LUMENS	DIMENSION
------	-------	------	----	--------	-----------



 144203	1*3.5W	SMD	65	90 lm/W	82 x 100 x 43mm
 144207	2*3.5W	SMD	65	90 lm/W	82 x 230 x 43mm

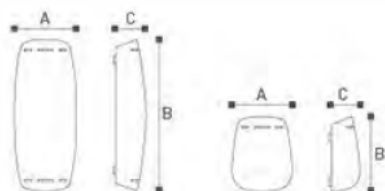

Color Options

SG DG B

Beam Angle



2700K
3000K
4000K
5000K
6000K

