



1468105 / 205 / 305

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Tempered glass diffuser, UV stabilized with a better light output.

Mounting - LED Surface mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).


Objective

When it comes to picking out lighting fixtures for your area, consider this lighting fixture. Providing ambient lighting over a greater surface area is one of its advantage. This will also give pleasantly light on its area. As an LED, energy savings is expected with the good quality fittings. Completely dustproof. Protected against high pressure water jets.

Obbiettivo

Quando si tratta di scegliere gli apparecchi di illuminazione per la tua zona, considera questo dispositivo di illuminazione. Fornire un'illuminazione ambigua su una superficie maggiore è uno dei suoi vantaggi. Questo darà anche piacevolmente leggero sulla sua area. Come un LED, energia è previsto un risparmio con gli accessori di buona qualità. Completamente antipolvere. Protetto contro i getti d'acqua ad alta pressione.


	CODE	POWER	CHIP	IP	LUMEN	DIMENSION
	1468105	1*5W	SMD	67	90 lm/W	100 x 50 x 43mm
	1468205	2*5W	SMD	67	90 lm/W	170 x 50 x 43mm
	1468305	3*5W	SMD	67	90 lm/W	270 x 50 x 43mm

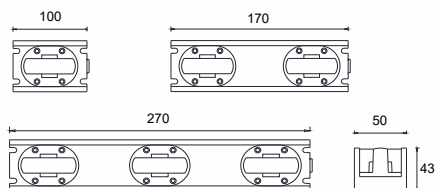

Color Options

SG DG B

Beam Angle



2700K
3000K
4000K
5000K
6000K

1-10
Dimming

DMX

