

150328 / 36 / 40 / 48

Description

Housing - Extruded aluminium frame with aluminium finish powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Prismatic PMMA anti glare diffuser light guide plate evenly spreads light to the center of luminaire, UV stabilized with a better light output.

Mounting - LED Recessed mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective


LED Packages are adhered to sides of LGP. PMMA light guide plate evenly spreads light to the center of luminaire. Soft light spreading from edge is easy to eyes. Luminaire can be easily installed directly on ceiling. LED Energy saving and durability of the fitting is expected on this fitting. Completely dustproof. Protected against splash of water.

Obiettivo

I pacchetti LED sono aderiti ai lati di LGP. La piastra di guida della luce in PMMA diffonde uniformemente la luce al centro dell'apparecchio. La luce morbida che si diffonde dal bordo è facile da vedere. L'apparecchio può essere facilmente installato direttamente sul soffitto. LED Il risparmio energetico e la durata del raccordo sono previsti per questo raccordo. Completamente antipolvere. Protetto contro gli spruzzi d'acqua.



	CODE	POWER	CHIPS	IP	LUMENS	DIMENSION
	150328	28W	SMD	54	110 lm/W	295 x 295mm
	150336	36W	SMD	54	110 lm/W	595 x 595mm
	150340	40W	SMD	54	110 lm/W	595 x 595mm
	150348	48W	SMD	54	110 lm/W	595 x 595mm




Color Options

(W)



Beam Angle

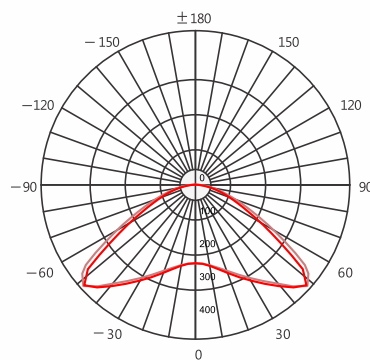

2700K
3000K
4000K
5000K
6000K

DALI
1-10 Dimming
Phase Dimming