



162414 / 24 / 36

Description

Housing - Extruded aluminium with anodized frame with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Tempered glass diffuser, UV stabilized with a better light output.

Mounting - LED Surface mounted.

Standards - Manufactured and tested as per PTPS IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective

Streamline design with an elegant presentation, our linear light fully shows workplace characteristic - formal and lively, efficient and flexible. Applications: Offices, Schools, Hotels, Shopping Malls, Public buildings, etc. Environmental friendly thanks to the energy and consumption savings guaranteed from its characteristics. Protected against the penetration by solid bodies. Protected against sprays of water.


Obiettivo

Razionalizzi il design, con una presentazione elegante, la nostra la luce lineare mostra pienamente le caratteristiche del luogo di lavoro: formale e vivace e flessibile. Applicazioni: uffici, Scuole, ospedali, alberghi, centri commerciali, pubblici edifici, ecc. Risparmio sui consumi energetici a LED con durata e apparecchi con efficienza. Protetto contro la penetrazione di corpi solidi. Protetto contro gli spruzzi d'acqua.


CODE	POWER	CHIP	IP	LUMENS	DIMENSION
162414	14 W	SMD	66	100 lm/W	L500 x W35 x H62mm
162424	24W	SMD	66	100 lm/W	L988 x W35 x H62mm
162436	36W	SMD	66	100 lm/W	L988 x W35 x H62mm



Beam Angle

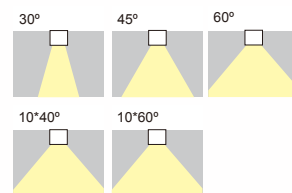

Color Options

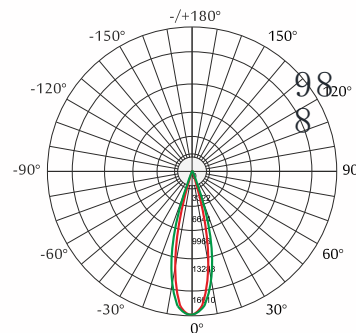

- RGB
- 2700K
- 3000K
- 4000K
- 5000K
- 6000K

- DMX512
- DALI
- 1-10 Dimming
- Phase Dimming

External Linear