



171215

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Tempered glass diffuser, UV stabilized with a better light output.

Reflector - Aluminium reflector, UV stabilized.

Mounting - LED Surface mounted.

Standards - Manufactured in accordance with EN 60598-1 and 60598-2-1.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective

Available in a choice of options in a matter of design and power, plus the chance to more than easily replace the LED source with another one, same or different it will be. This item is pure functionality and adaptable to every requirement. The high efficiency of the LED source ensures excellent performances and low consumptions. Energy and economy savings are a little advantage compared to the design of this item.


Completely dustproof.
Protected against jets of water.

Obbiettivo


Disponibile in una vasta gamma di opzioni in termini di design e potenza, oltre alla possibilità di sostituire più facilmente la sorgente LED con un'altra, uguale o diversa. Questo articolo è pura funzionalità e adattabile ad ogni esigenza. L'elevata efficienza della sorgente LED garantisce prestazioni eccellenti e bassi consumi. Risparmio energetico ed economico sono un piccolo vantaggio rispetto al design di questo prodotto.

Completamente antipolvere.
Protetto contro i getti d'acqua.


CODE	POWER	CHIP	IP	LUMENS	DIMENSION
171215	15W	COB	44	100lm/W	Ø68 x 130mm

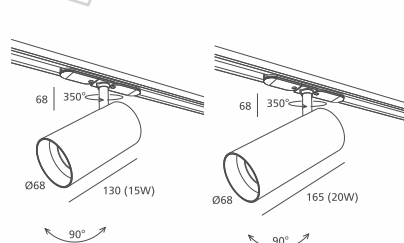


COB ADAPTER



Beam Angle



Color Options



2700K
3000K
4000K
5000K
6000K

