



173012 / 25 / 35

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Tempered glass diffuser, UV stabilized with a better light output.

Reflector - Aluminium reflector, UV stabilized.

Mounting - LED Surface mounted.

Standards - Manufactured in accordance with EN 60598-1 and 60598-2-1.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).


Objective

Perfect for work lighting especially in places where a lot of nice and bright light is required. Since downlight has the advantage of light adjustment they can be installed around the edge of the room to get that clean and streamlined light for that perfect ambience. Protected against the penetration by solid bodies. Protected against sprays of water.

Obbiettivo

Perfetto per l'illuminazione di lavoro soprattutto in luoghi dove molto bello e luminoso è richiesta luce. Dal momento che il downlight ha il vantaggio della regolazione della luce loro può essere installato facilmente lungo il bordo del spazio per ottenere quello pulito e aerodinamico luce per l'atmosfera perfetta. Protetto contro la penetrazione di corpi solidi. Protetto contro gli spruzzi d'acqua.



	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
	173012	12W	COB	44	100 lm/W	Ø62 x 115 x 125mm
	173025	25W	COB	44	100 lm/W	Ø80 x 136 x 140mm
	173035	35W	COB	44	100 lm/W	Ø100 x 156 x 155mm

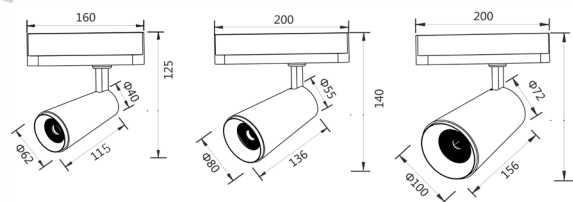

Beam Angle

Color Options

W B

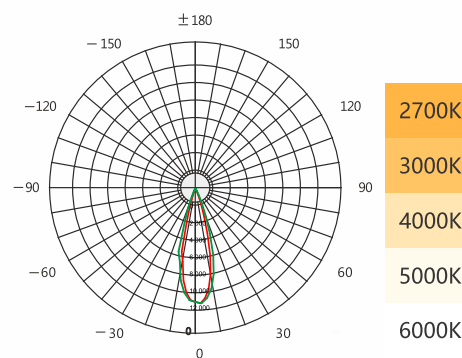

DALI
1-10
Dimming
Phase
Dimming



CRI
>90

-20° C
55° C

85~265V
50/60Hz

