


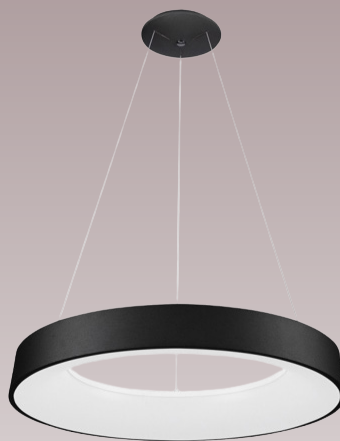

1836026 / 36 / 52

Description

Housing - Aluminium / Iron Material
radiation protection, UV with high mechanical resistance.

Diffuser - Acrylic diffuser,
UV stabilized with a better light output.

Mounting - LED Surface / Pendant Chandelier.

Standards - Manufactured in accordance with
IEC 62722.

LED - Energy saving consumption and Durability.
Efficiency and quality in wide variation.
50,000 Hrs Life span under temperature
(-20°C to 55°C).

Objective



Perfect for work lighting especially in places where a lot of nice and bright light is required. Since Chandelier has the advantage of light adjustment they can be installed around the edge of the room to get that clean and streamlined light for that perfect ambience. Protected against the penetra on by solid bodies with dimensions greater than $\varnothing$ 1 mm. It is not protected against liquid penetration.

Obbiettivo

Perfetto per l'illuminazione di lavoro soprattutto in luoghi dove molto bello e luminoso è richiesta luce. Dal momento che il Chandelier ha il vantaggio della regolazione della luce loro può essere installato facilmente lungo il bordo del spazio per ottenere quello pulito e aerodinamico luce per l'atmosfera perfetta.

Prote o contro la penetrazione di corpi solidi di dimensioni superiori a $\varnothing$ 1 mm.
Non è prote o contro la penetrazione di liquidi.

	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
	1836026	26W	SMD	20	70 lm/W	Ø400mm x 140mm
	1836036	36W	SMD	20	70 lm/W	Ø500mm x 140mm
	1836052	52W	SMD	20	70 lm/W	Ø600mm x 140mm

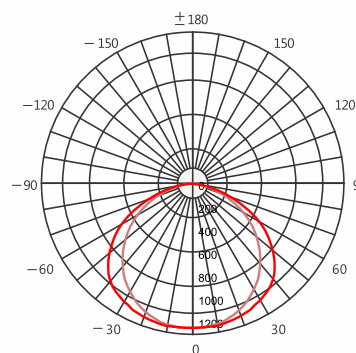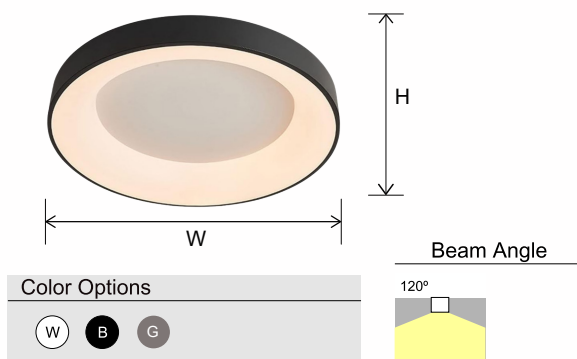

2700K
3000K
4000K
5000K
6000K

DALI
1-10
Dimming
Phase
Dimming