

184210 / 15 / 20 / 25

Description

Housing - Made of Polycarbonate and ABS material, high impact strength, radiation protection, UV with high mechanical resistance.

Diffuser - Polycarbonate Diffuser, UV stabilized with a better light output.

Mounting - LED Ceiling Surface mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective

This luminaires unique design gives a pleasant and warm ambiece to ones eye. Due to LED characteristics this fitting gives more efficiency and durability on itself. LED energy saving consumption is expected. Durability and long lasting quality is expected. Completely dustproof.


Protected against jets of water.

Obbiettivo

Questo design unico di apparecchi di illuminazione offre un ambiente piacevole e caldo alla vista. Grazie alle caratteristiche del LED, questo apparecchio offre maggiore efficienza e durata su se stesso. Si prevede un consumo di risparmio energetico a LED. Sono previste resistenza e qualità duratura. Completamente antipolvere.

Protetto contro i getti d'acqua.

	CODE	POWER	BULB	IP	LUMENS	DIMENSION
1	184210	10W	SMD	65	90 lm/W	Ø260 x 57 mm
1	184215	15W	SMD	65	90 lm/W	Ø260 x 57 mm
1	184220	20W	SMD	65	90 Ilm/W	Ø260 x 57 mm
1	184225	25W	SMD	65	90 lm/W	Ø320 x 57 mm

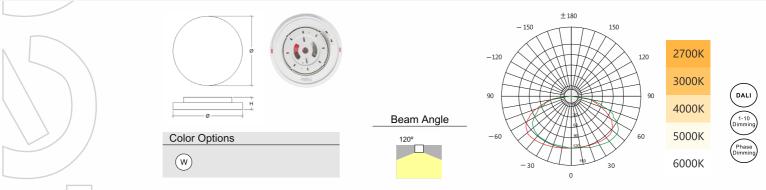





















CRI -40° C >90

85~265V 50° C 50/60Hz

Leggéro° PHILIPS TRIDONIC

BRIDGELUX CREE C

