



185630 / 42

Description

Housing - Aluminum Material
radiation protection, UV with high mechanical resistance.

Diffuser - Acrylic Diffuser
UV stabilized with a better light output.

Mounting - LED Surface Mounted

Standards - Manufactured in accordance with
IEC 62722.

LED - Energy saving consumption and Durability.
Efficiency and quality in wide variation.
50,000 Hrs Life span under temperature
(-20°C to 55°C).

Objective

Perfect for work lighting especially in places where a lot of nice and bright light is required. Since Chandelier has the advantage of light adjustment they can be installed around the edge of the room to get that clean and streamlined light for that perfect ambience. Protected against the penetra on by solid bodies with dimensions greater than $\varnothing$ 1 mm. It is not protected against liquid penetration.

Obbiettivo

Perfetto per l'illuminazione di lavoro soprattutto in luoghi dove molto bello e luminoso è richiesta luce. Dal momento che il Chandelier ha il vantaggio della regolazione della luce loro può essere installato facilmente lungo il bordo del spazio per ottenere quello pulito e aerodinamico luce per l'atmosfera perfetta.


Prote o contro la penetrazione di corpi solidi di dimensioni superiori a $\varnothing$ 1 mm.
Non è prote o contro la penetrazione di liquidi.

	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
	185630	30W	SMD	20	70 lm/W	Ø420 x 130 mm
	185642	42W	SMD	20	70 lm/W	Ø550 x 130 mm

Color Options

(W) (B)

Beam Angle

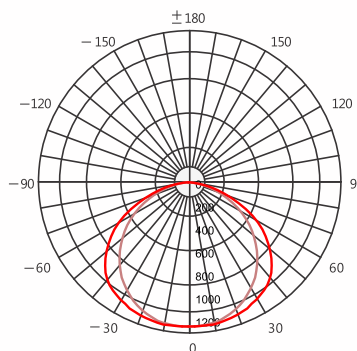

2700K
3000K
4000K
5000K
6000K

DALI

1-10
Dimming

Phase
Dimming