



220420 / 40 / 60 / 80

Description

Housing - Made of Aluminium alloy material radiation protection, UV with high mechanical resistance & with stainless steel Clip.

Diffuser - Polycarbonate diffuser. UV stabilized with longitudinal striations for a better control of glare and a high light output.

Reflector - White aluminium backsheet reflector UV stabilized.

Mounting - LED Surface mounted.

Standards - Manufactured in accordance with EN 60598-1 and 60598-2-1

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 60,000 Hrs Life span under temperature (-20°C to 55°C).




Objective

This LED luminaire high efficiency LED system produces high performances of luminous flux with various color temperature illumination. Energy saving consumption is expected and bright and warm lighting effect is the result. LED Innovation makes this luminaire one of the best luminaire in this series. Completely dustproof. Protected against jets of water.

Obiettivo

Questo sistema LED ad alta efficienza per apparecchi a LED produce elevate prestazioni di flusso luminoso con diverse temperature di colore. Il consumo di energia è previsto e l'effetto luminoso e caldo è il risultato. L'innovazione LED rende questo luminaire uno dei migliori apparecchi di questa serie. Completamente antipolvere. Protegge contro getti d'acqua.

	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
	220420	20W	SMD	65	120 lm/W	600 x 517.6 x 90 x 77mm
	220440	40W	SMD	65	120 lm/W	1200 x 1117.6 x 90 x 77mm
	220460	60W	SMD	65	120 lm/W	1500 x 1417.6 x 90 x 77mm
	220480	80W	SMD	65	120 lm/W	1500 x 1717.6 x 90 x 77mm

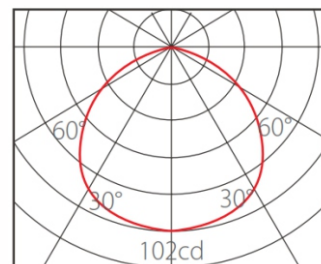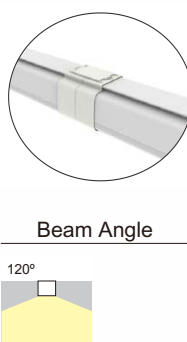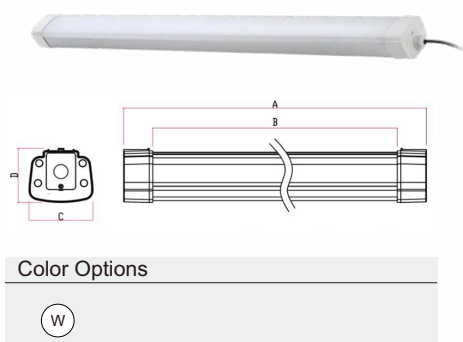

2700K
3000K
4000K
5000K
6000K

DALI
1-10 Dimming
Phase Dimming



CRI
>90

-20° C
55° C

85~265V
50/60Hz



IK09