



240110 / 15 / 20 / 30 / 42

Description

Housing - Die cast aluminium powder coated with choice of RAL colors radiation protection, UV with high mechanical resistance.

Diffuser - Tempered glass diffuser, UV stabilized with a better light output.

Reflector - Aluminium reflector, UV stabilized.

Standards - Manufactured and tested as per EN 60598-1 and 60598-2-1.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective

Provides highly efficient LED performances yet saves consumption. High resistance fitting that assured durability according to its uses. This is best for gardens, external uses and etc.

Completely dustproof.

Protected against high pressure water jets.

Obbiettivo


Fornire un proiettore come la luce è la caratteristica principale di questo proiettore. Poiché si tratta di una luce a LED, produrrà sicuramente luce ad alte prestazioni ed efficienza. Funziona perfettamente secondo il risparmio energetico del LED.

Completamente antipolvere.



Protetto contro i getti d'acqua ad alta pressione.



	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
	240110	1*10W	COB	65	100 lm/W	Ø68 x 130mm
	240115	1*15W	COB	65	100 lm/W	Ø68 x 130mm
	240120	1*20W	COB	65	100 lm/W	Ø90 x 160mm
	240130	1*30W	COB	65	100 lm/W	Ø90 x 190mm
	240142	1*42W	COB	65	100 lm/W	Ø150 x 195mm

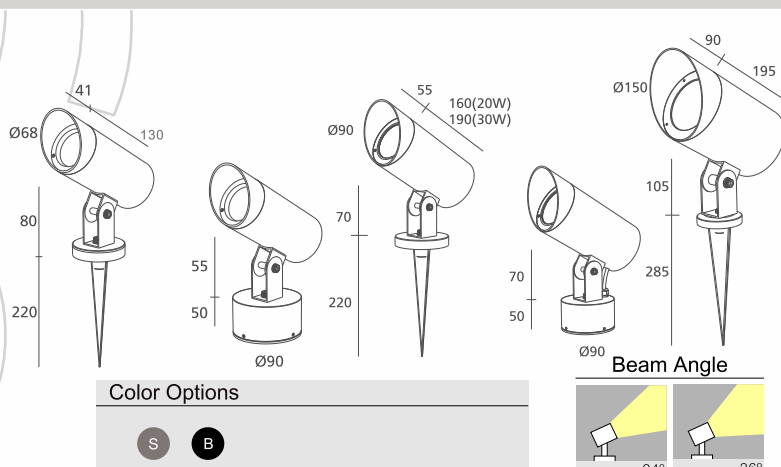

Color Options

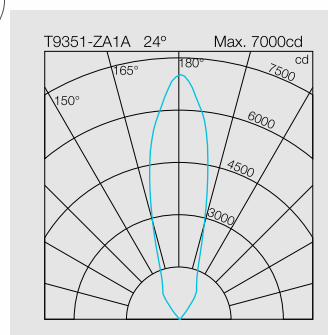

2700K
3000K
4000K
5000K
6000K



IK08

CRI
>90

-20° C
55° C

85~265V
50/60Hz

leggero
PHILIPS

LED Chips
BRIDGELUX
CREE

