



163103 / 06 / 12 / 24 / 36

### Description

**Housing** - High Corrosion Die cast aluminium powder coated with choice of RAL colors, High corrosion stainless steel 316 trim cover, radiation protection, UV with high mechanical resistance.

**Diffuser** - Clear or frosted glass diffuser with PMMA optical lens, UV stabilized with a better light output.

**Reflector** - Aluminium reflector, UV stabilized.

**Mounting** - LED recessed luminaire.

**Standards** - Manufactured and tested as per PTPS IEC 62722.

**LED** - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

### Objective


Streamline design with an elegant presentation, our linear light fully shows workplace characteristic - formal and lively, efficient and flexible. Applications: Offices, Schools, Hotels, Shopping Malls, Public buildings, etc. Environmental friendly thanks to the energy and consumption savings guaranteed from its characteristics. Protected against the penetration by solid bodies. Protected against sprays of water.

### Obiettivo

Razionalizzi il design, con una presentazione elegante, la nostra luce lineare mostra pienamente le caratteristiche del luogo di lavoro: formale e vivace e flessibile. Applicazioni: uffici, Scuole, ospedali, alberghi, centri commerciali, pubblici edifici, ecc. Risparmio sui consumi energetici a LED con durata e apparecchi con efficienza. Protetto contro la penetrazione di corpi solidi. Protetto contro gli spruzzi d'acqua.

| CODE   | POWER | CHIP | IP | LUMENS   | DIMENSION          |
|--------|-------|------|----|----------|--------------------|
| 163103 | 3W    | SMD  | 67 | 100 lm/W | 200 x 80 x 75H mm  |
| 163106 | 6W    | SMD  | 67 | 100 lm/W | 300 x 80 x 75H mm  |
| 163112 | 12W   | SMD  | 67 | 100 lm/W | 500 x 80 x 75H mm  |
| 163124 | 24W   | SMD  | 67 | 100 lm/W | 1000 x 80 x 75H mm |
| 163136 | 36W   | SMD  | 67 | 100 lm/W | 1000 x 80 x 75H mm |



|  |        |     |     |    |          |                    |
|--|--------|-----|-----|----|----------|--------------------|
|  | 163103 | 3W  | SMD | 67 | 100 lm/W | 200 x 80 x 75H mm  |
|  | 163106 | 6W  | SMD | 67 | 100 lm/W | 300 x 80 x 75H mm  |
|  | 163112 | 12W | SMD | 67 | 100 lm/W | 500 x 80 x 75H mm  |
|  | 163124 | 24W | SMD | 67 | 100 lm/W | 1000 x 80 x 75H mm |
|  | 163136 | 36W | SMD | 67 | 100 lm/W | 1000 x 80 x 75H mm |

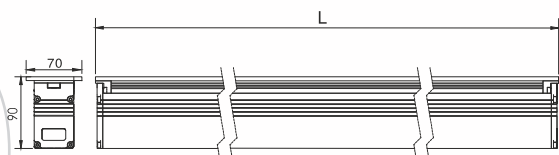

Color Options

S B

Beam Angle



RGB

2700K

3000K

4000K

5000K

6000K

DALI

1-10 Dimming

Phase Dimming



Floor recessed