


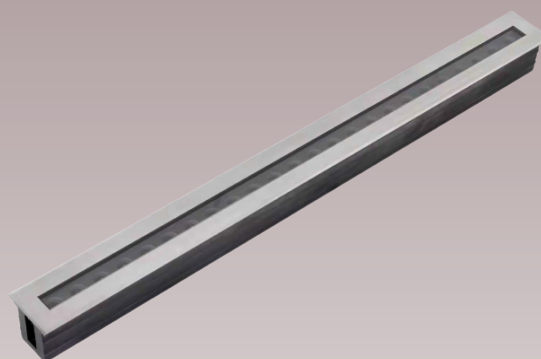

163218 / 24 / 36

Description

Housing - Made of good quality 304 stainless steel with anodized treatment on surface, excellent heat dissipation, radiation protection, UV with high mechanical resistance.

Diffuser - Clear or frosted glass diffuser with PMMA optical lens, UV stabilized with a better light output.

Mounting - LED recessed luminaire.

Standards - Manufactured and tested as per PTSP IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-40°C to 55°C).


Objective

Streamline design with an elegant presentation, our linear light fully shows workplace characteristic - formal and lively, efficient and flexible. Applications: Offices, Schools, Hotels, Shopping Malls, Public buildings, etc. Environmental friendly thanks to the energy and consumption savings guaranteed from its characteristics. Protected against the penetration by solid bodies. Protected against sprays of water.



Obiettivo

Razionalizzi il design, con una presentazione elegante, la nostra la luce lineare mostra pienamente le caratteristiche del luogo di lavoro: formale e vivace e flessibile. Applicazioni: uffici, Scuole, ospedali, alberghi, centri commerciali, pubblici edifici, ecc. Risparmio sui consumi energetici a LED con durata e apparecchi con efficienza. Protetto contro la penetrazione di corpi solidi. Protetto contro gli spruzzi d'acqua.

	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
	163218	18W	SMD	67	100 lm/W	1000 x 90 x 90H mm
	163224	24W	SMD	67	100 lm/W	1000 x 90 x 90H mm
	163236	36W	SMD	67	100 lm/W	1000 x 90 x 90H mm

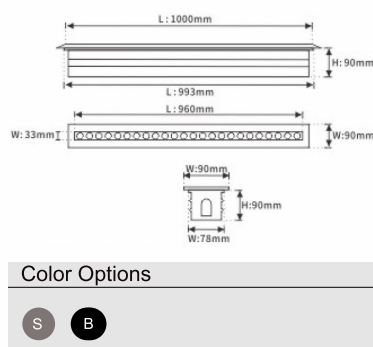

Beam Angle

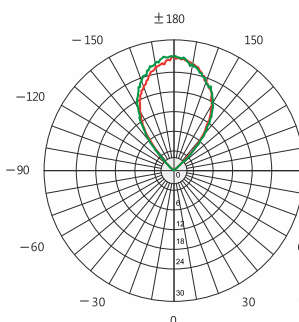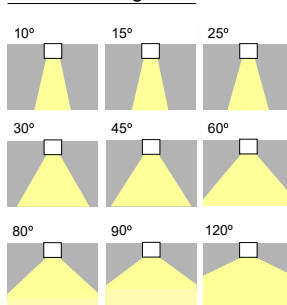

RGB

2700K

3000K

4000K

5000K

6000K

