



241710 / 15 / 20 / 30 / 50 / 60

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Transparent tempered glass diffuser, UV stabilized with a better light output.

Type - LED Surface Mounted. (Base, Spike, Pole)

Standards - Manufactured and tested as per EN 60598-1 and 60598-2-1.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective

High resistance fitting that assured durability according to its uses. Provides highly efficient LED performances yet saves consumption. This is best for gardens, external uses and etc. LED energy consumption savings with durability and luminaire with efficiency. Completely dustproof. Protected against high pressure water jets.

Obbiettivo


Montaggio ad alta resistenza che garantisce una lunga durata in base ai suoi usi. Fornisce prestazioni LED altamente efficienti ma risparmia i consumi. Questo è il migliore per giardini, usi esterni e così via. Risparmio di consumo energetico a LED con durata e apparecchi con efficienza.

Completamente antipolvere.



Protetto contro i getti d'acqua ad alta pressione.



CODE	POWER	CHIP	IP	LUMENS	DIMENSION
241710	10W	COB	66	100 lm/W	Ø95 x 200mm
241715	15W	COB	66	100 lm/W	Ø95 x 200mm
241720	20W	COB	66	100 lm/W	Ø95 x 200mm
241730	30W	COB	66	100 lm/W	Ø140 x 255mm
241750	50W	COB	66	100 lm/W	Ø140 x 255mm
241760	60W	COB	66	100 lm/W	Ø140 x 255mm

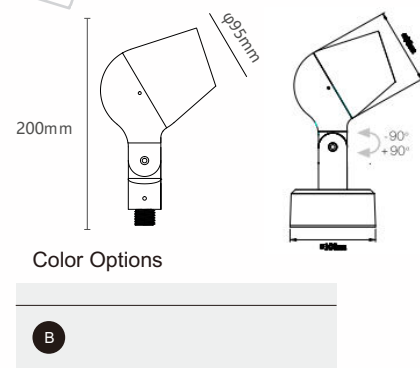

Beam Angle

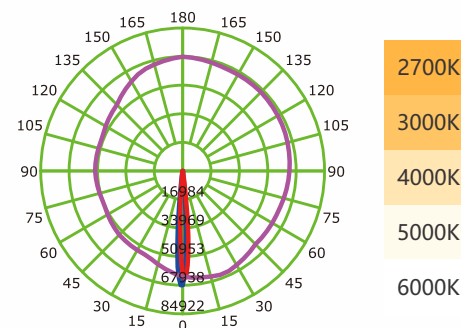

2700K

3000K

4000K

5000K

6000K

Tree Mounting

Material : Aluminium & Polyster
: Stainless Steel




Surface Base Mounting Ground & Wall



Arm Pole Mounting

Material : Die-cast Aluminium

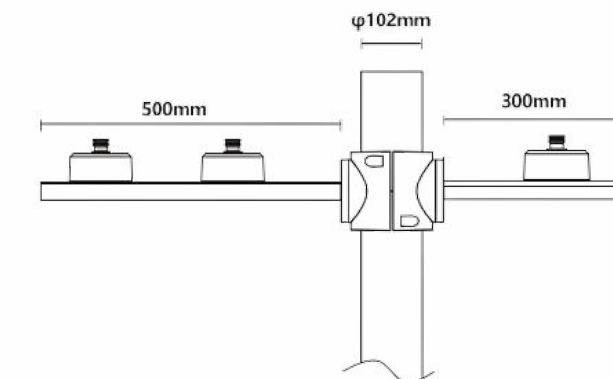

Spike Mounting

Material : Polycarbonate



Flange Mounting Unilateral & Bilateral

