



2443100 / 150 / 180

Description

Housing - Die cast aluminium for perfect dissipation powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Tempered optical glass diffuser, UV stabilized with a better light output.

Mounting - LED Surface luminaire

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).




Objective

Perfect for work lighting especially in places where a lot of nice and bright light is required. Since downlight has the advantage of light adjustment they can be installed around the edge of the room to get that clean and streamlined light for that perfect ambience. Protected against the penetration by solid bodies. Protected against sprays of water.

Obbiettivo

Perfetto per l'illuminazione di lavoro soprattutto in luoghi dove molto bello e luminoso è richiesta luce. Dal momento che il downlight ha il vantaggio della regolazione della luce loro può essere installato facilmente lungo il bordo del spazio per ottenere quello pulito e aerodinamico luce per l'atmosfera perfetta. Protetto contro la penetrazione di corpi solidi. Protetto contro gli spruzzi d'acqua.

	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
	2443100	100W	SMD	66	100 lm/W	171 x 126 x 52 x 278mm
	2443150	150W	SMD	66	100 lm/W	178 x 133 x 60 x 328mm
	2443180	180W	SMD	66	100 lm/W	196 x 151 x 75 x 388mm

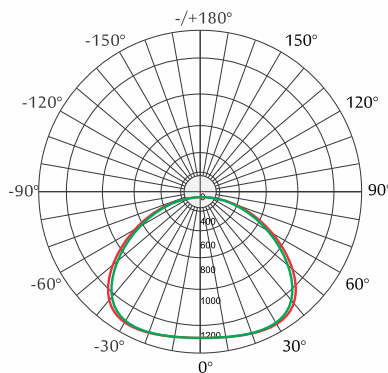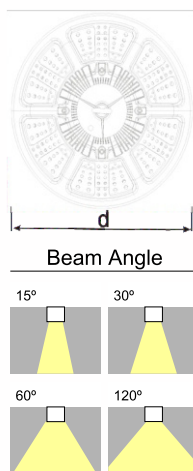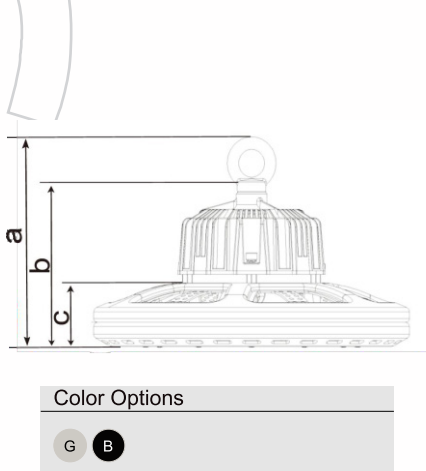

2700K
3000K
4000K
5000K
6000K



CRI
>90

-20° C
55° C

85~265V
50/60Hz

Drivers
Leggero
PHILIPS

LED Chips
BRIDGELUX
CREE

