



2444020 / 30 / 50 / 100 / 150 / 200 / 300

Description

Housing - Extruded aluminium heat sink, Resist corrosion proof aluminium, galvanized mounting bracket with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Clear Tempered glass diffuser, UV stabilized with a better light output.

Type - LED Surface mounted luminaire

Standards - Manufactured and tested as per EN 60598-1 and 60598-2-1.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective

High resistance fitting that assured durability according to its uses. Provides highly efficient LED performances yet saves consumption. This is best for gardens, external uses and etc. LED energy consumption savings with durability and luminaire with efficiency. Completely dustproof. Protected against high pressure water jets.




Obbiettivo

Montaggio ad alta resistenza che garantisce una lunga durata in base ai suoi usi. Fornisce prestazioni LED altamente efficienti ma risparmia i consumi. Questo è il migliore per giardini, usi esterni e così via. Risparmio di consumo energetico a LED con durata e apparecchi con efficienza. Completamente antipolvere. Protetto contro i getti d'acqua ad alta pressione.

	CODE	POWER	CHIP	IP	LUMENS	SIZE
	2444020	20W	SMD	66	100 lm/W	137 x 117 x 34mm
	2444030	30W	SMD	66	100 lm/W	170 x 148 x 36mm
	2444050	50W	SMD	66	100 lm/W	219 x 188 x 41mm
	2444100	100W	SMD	66	100 lm/W	253 x 231 x 52mm
	2444150	150W	SMD	66	100 lm/W	300 x 270 x 56mm
	2444200	200W	SMD	66	100 lm/W	318 x 288 x 62mm
	2444300	300W	SMD	66	100 lm/W	378 x 248 x 64mm



Beam Angle

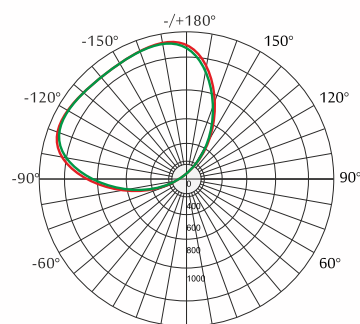

2700K
3000K
4000K
5000K
6000K

DALI
1-10
Dimming
Phase
Dimming

Spike & Flood



IK09

CRI
>90

-20° C
55° C

85~265V
50/60Hz

leggero
Drivers
PHILIPS
TRIDONIC

LED Chips
BRIDGELUX
CREE

