



2451003 / 05 / 10

Description

Housing - High Quality aluminium alloy with painting with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - PMMA lens diffuser, UV stabilized with a better light output.

Reflector - Aluminium reflector, UV stabilized.

Type - LED Surface

Standards - Manufactured and tested as per EN 60598-1 and 60598-2-1.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).


Objective

High resistance fitting that assured durability according to its uses. Provides highly efficient LED performances yet saves consumption. This is best for gardens, external uses and etc. LED energy consumption savings with durability and luminaire with efficiency. Completely dustproof. Protected against high pressure water jets.

Obbiettivo

Montaggio ad alta resistenza che garantisce una lunga durata in base ai suoi usi. Fornisce prestazioni LED altamente efficienti ma risparmia i consumi. Questo è il migliore per giardini, usi esterni e così via. Risparmio di consumo energetico a LED con durata e apparecchi con efficienza. Completamente antipolvere. Protetto contro i getti d'acqua ad alta pressione.



	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
	2451003	3W	COB	65	100 lm/W	125 x 50 x 60mm
	2451005	5W	COB	65	100 lm/W	125 x 50 x 60mm
	2451010	10W	COB	65	100 lm/W	125 x 50 x 60mm



Color Options

SG DG B

Beam Angle

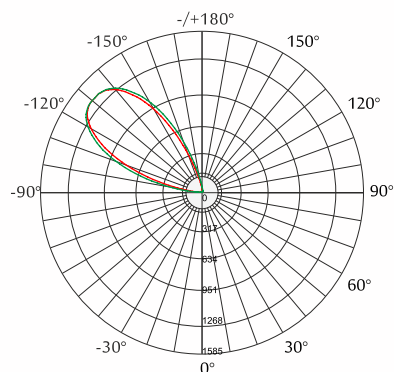

2700K
3000K
4000K
5000K
6000K

DALI
1-10
Dimming
Phase
Dimming