



2452008 / 10 / 15 / 20

Description

Housing - High Quality aluminium alloy with painting with choice of RAL colors, radiation protection, UV with high mechanical resistance, and excellent heat dissipation

Diffuser - PMMA lens diffuser, UV stabilized with a better light output.

Type - LED Surface, Spike

Standards - Manufactured and tested as per EN 60598-1 and 60598-2-1.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective

High resistance fitting that assured durability according to its uses. Provides highly efficient LED performances yet saves consumption. This is best for gardens, external uses and etc. LED energy consumption savings with durability and luminaire with efficiency. Completely dustproof.

Protected against high pressure water jets.



Obiettivo

Montaggio ad alta resistenza che garantisce una lunga durata in base ai suoi usi. Fornisce prestazioni LED altamente efficienti ma risparmia i consumi. Questo è il migliore per giardini, usi esterni e così via. Risparmio di consumo energetico a LED con durata e apparecchi con efficienza.

Completamente antipolvere.

Protetto contro i getti d'acqua ad alta pressione.



	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
	2452008	8W	COB	65	100 lm/W	Ø73 x 90 x 140mm
	2452010	10W	COB	65	100 lm/W	Ø73 x 90 x 140mm
	2452015	15W	COB	65	100 lm/W	Ø73 x 90 x 140mm
	2452020	20W	COB	65	100 lm/W	Ø73 x 90 x 140mm



Color Options

SG

Beam Angle

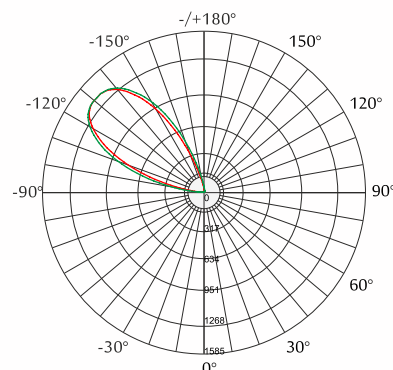

2700K
3000K
4000K
5000K
6000K

DALI
1-10
Dimming
Phase
Dimming

Spike & Flood