



260412

Description

Material - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Polycarbonate diffuser, UV stabilized with a better light output.

Mounting - LED Recessed mounted.

Standards - Manufactured and tested as per PTSP IEC 62722.


LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective

This luminaire is essentially good quality. LED light sources are of the latest generation of LED. Great efficiency and energy saving is expected on this luminaire. Quality raw materials and safety warranty for the electrical system and for the users. Durability and satisfactory is expected. Completely dustproof. Protected against jets of water.

Obiettivo

Questo apparecchio è essenzialmente di buona qualità. Le sorgenti luminose a LED sono di ultima generazione di LED. Grande efficienza e risparmio energetico sono previsti per questo apparecchio. Materie prime di qualità e garanzia di sicurezza per l'impianto elettrico e per gli utenti. Si prevede una durata e soddisfacente. Completamente antipolvere. Protetto contro i getti d'acqua.

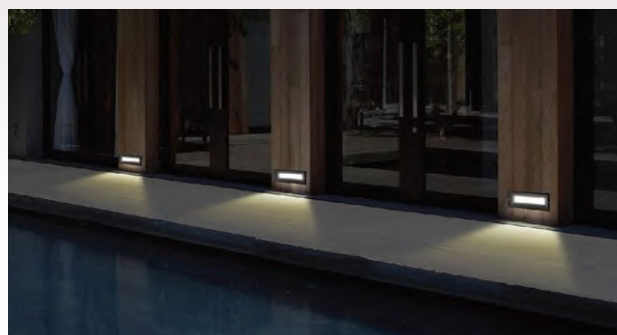

CODE

POWER

TYPE

IP

LUMENS

DIMENSION



260412


12W

LED

65

90 lm/W

250 x 90 x 98mm

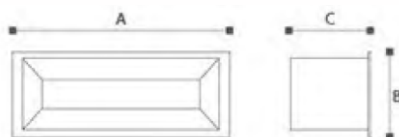


Color Options

SG

DG

B

Beam Angle



2700K

3000K

4000K

5000K

6000K

Wall recessed



IK09

CRI >90

-20° C
55° C

85~265V
50/60Hz

Leggero
PHILIPS

