


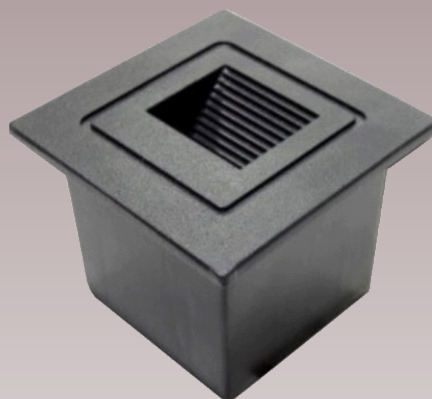

2612003

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - PMMA diffuser, UV stabilized with a better light output.

Mounting - LED Recessed luminaire

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).


Objective

This luminaire is essentially good quality. LED light sources are of the latest generation of LED. Great efficiency and energy saving is expected on this luminaire. Quality raw materials and safety warranty for the electrical system and for the users. Durability and satisfactory is expected. Completely dustproof. Protected against jets of water.

Obbiettivo

Questo apparecchio è essenzialmente di buona qualità. Le sorgenti luminose a LED sono di ultima generazione di LED. Grande efficienza e risparmio energetico sono previsti per questo apparecchio. Materie prime di qualità e garanzia di sicurezza per l'impianto elettrico e per gli utenti. Si prevede una durata e soddisfacente. Completamente antipolvere. Protetto contro i getti d'acqua.


	CODE	POWER	CHIP	IP	LUMENS	DIMENSION
	2612003	3W	SMD	66	90 lm/W	55 x 55mm



Color Options

SG DG B

Beam Angle



2700K
3000K
4000K
5000K
6000K

DALI
1-10 Dimming
Phase Dimming

Wall recessed



CRI
>90

-20° C
55° C

85~265V
50/60Hz

