



2727006 / 12 / 18 / 24 / 36

**Description**

**Housing** - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

**Diffuser** - Tempered glass diffuser, UV stabilized with a better light output.

**Type** - LED Recessed mounted.

**Standards** - Manufactured and tested as per EN 60598-1 and 60598-2-1.

**LED** - Energy saving consumption and Durability. Efficiency and quality in wide variation. 60,000 Hrs Life span under temperature (-20°C to 55°C).




**Objective**

Eco friendly recessed light fittings yet will guaranteed you that this product is durable and will last long. Since this is LED light this will surely saves you from a costly consumption of energy. Expected to provide the great results on minimal consumption. Completely dustproof. Protected from temporary immersion.

**Obbiettivo**

Gli apparecchi di illuminazione da incasso vi garantirà tuttavia che questo prodotto è durevole e durerà a lungo. Dato che si tratta di una luce a LED, questo ti farà sicuramente risparmiare da un costoso consumo di energia. Previsto per fornire I grandi risultati sul consumo minimo. Completamente antipolvere. Prote o dall'immersione temporanea.

| CODE    | POWER | CHIP      | IP | LUMENS  | DIMENSION (Ø1 x H1   Ø2 x H2) |
|---------|-------|-----------|----|---------|-------------------------------|
| 2727006 | 6W    | COB / SMD | 67 | 660lm   | Ø130 x 129   Ø119 x 136mm     |
| 2727012 | 12W   | COB / SMD | 67 | 1320 lm | Ø160 x 149   Ø147 x 156mm     |
| 2727018 | 18W   | COB / SMD | 67 | 1980 lm | Ø180 x 165   Ø156 x 168mm     |
| 2727024 | 24W   | COB / SMD | 67 | 2640 lm | Ø210 x 175   Ø193 x 195mm     |
| 2727036 | 36W   | COB / SMD | 67 | 3960 lm | Ø250 x 183   Ø223 x 212mm     |

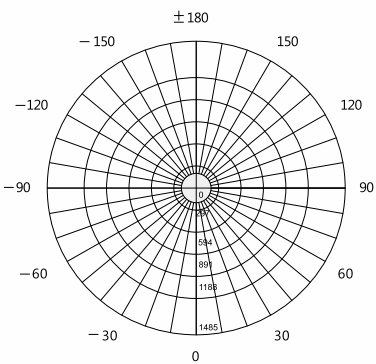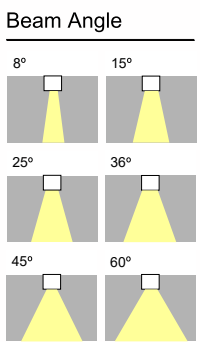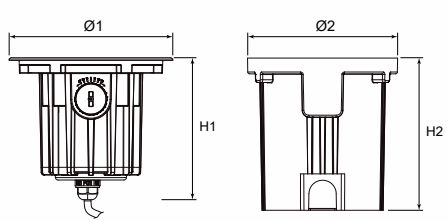

**Color Options**

SG DG B

**RGB**

2700K

3000K

4000K

5000K

6000K

RDM

DALI

0-10 Dimming

DMX