



2733012 / 15

Description

Housing - Made of 6063 aluminium alloy body with anodized treatment on surface, excellent heat dissipation, radiation protection, UV with high mechanical resistance.

Diffuser - PMMA Acrylic diffuser, scratch resistant, UV stabilized with a better light output.

Mounting - LED Surface / Recessed luminaire.

Standards - Manufactured and tested as per PTPS IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-40°C to 50°C).





Objective

Streamline design with an elegant presentation, our linear light fully shows workplace characteristic - formal and lively, efficient and flexible. Applications: Offices, Schools, Hotels, Shopping Malls, Public buildings, etc. Environmental friendly thanks to the energy and consumption savings guaranteed from its characteristics. Completely dustproof. Protected from temporary immersion

Obiettivo

Razionalizzi il design, con una presentazione elegante, la nostra luce lineare mostra pienamente le caratteristiche del luogo di lavoro: formale e vivace e flessibile. Applicazioni: uffici, Scuole, ospedali, alberghi, centri commerciali, pubblici edifici, ecc. Risparmio sui consumi energetici a LED con durata e apparecchi con efficienza. Completamente an polvere. Prote o dall'immersione temporanea.


	CODE	POWER	CHIP	IP	LUMENS	DIMENSION (L x W x H)
	2733012	12W	SMD	67	100 lm/W	1000 x 21 x 45mm
	2733015	15W	SMD	67	100 lm/W	1000 x 21 x 45mm

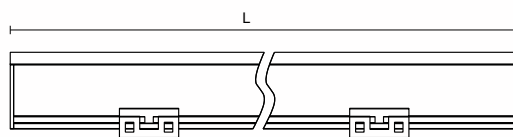

Color Options

S B

Beam Angle

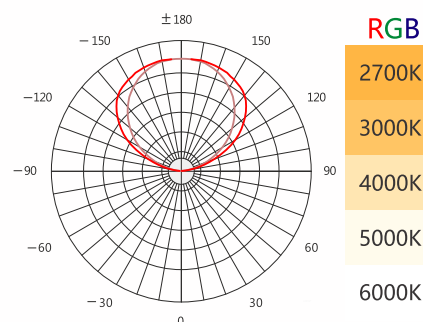

Floor recessed

