



280711
280811
280911

Description

Material - Die cast aluminium extruded sections with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Polycarbonate diffuser, UV stabilized with a better light output.

Standards - Manufactured and tested as per PTPS IEC 62722.


LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective

This is very suitable in private gardens, public parks and etc. This light delivers excellent performance and outstanding fitting durability. Also, this have a unique design and will be fitted everywhere in external areas. This luminaire is essentially good quality. LED light sources are of the latest generation of LED. Completely dustproof. Protected against high pressure water jets.

Obbiettivo


Questo è molto adatto in giardini privati, parchi pubblici ed ecc. Questa luce offre prestazioni eccellenti e una straordinaria durata nel montaggio. Inoltre, questo ha un design unico e verrà montato ovunque nelle aree esterne. Questo apparecchio è essenzialmente di buona qualità. Le sorgenti luminose a LED sono di ultima generazione di LED. Completamente antipolvere. Protetto contro i getti d'acqua ad alta pressione.

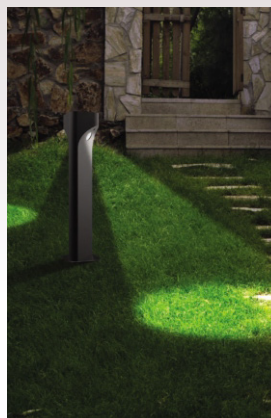

	CODE	POWER	TYPE	IP	LUMENS	DIMENSION
	280711	11W	SMD	65	90 lm/W	166 x 300 x 166mm
	280811	11W	SMD	65	90 lm/W	166 x 500 x 166mm
	280911	11W	SMD	65	90 lm/W	166 x 800 x 166mm

Color Options

SG DG B



2700K
3000K
4000K
5000K
6000K



IK08

CRI
>90

-20° C
55° C

85~265V
50/60Hz

leggero
PHILIPS

LED Chips
BRIDGELUX
CREE

