



281710
281812
281912

Description

Material - Die cast aluminium extruded sections with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Polycarbonate diffuser, UV stabilized with a better light output.

Standards - Manufactured and tested as per PTPS IEC 62722.


LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective

This light delivers excellent performance and outstanding fitting durability. This is very suitable in private gardens, public parks and etc. Also, this have a unique design and will be fitted everywhere in external areas. Provides quality light and energy efficiency. Completely dustproof. Protected against high pressure water jets.

Obbiettivo


Questa luce offre prestazioni eccellenti e una straordinaria durata nel montaggio. Questo è molto adatto in giardini privati, parchi pubblici ed ecc. Inoltre, questo ha un design unico e verrà montato ovunque nelle aree esterne. Fornisce luce di qualità ed efficienza energetica. Completamente antipolvere. Protetto contro i getti d'acqua ad alta pressione.

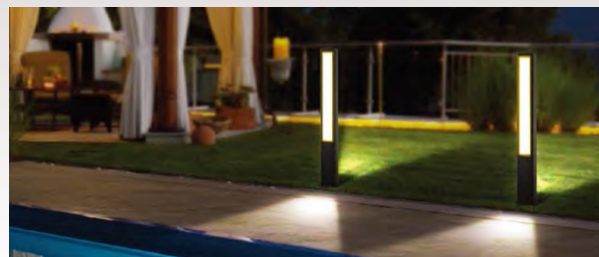

	CODE	POWER	TYPE	IP	LUMENS	DIMENSION
	281710	10W	SMD	65	90 lm/W	75 x 156 x 300mm
	281812	12W	SMD	65	90 lm/W	75 x 156 x 500mm
	281912	12W	SMD	65	90 lm/W	75 x 156 x 800mm

Color Options

SG DG B

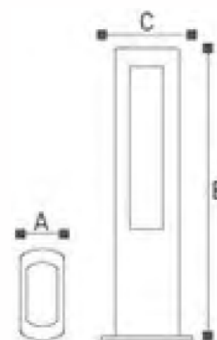

2700K
3000K
4000K
5000K
6000K



IK08

CRI >90

-20° C
55° C

85~265V
50/60Hz

Drivers
leggero
PHILIPS

LED Chips
BRIDGELUX
CREE

