


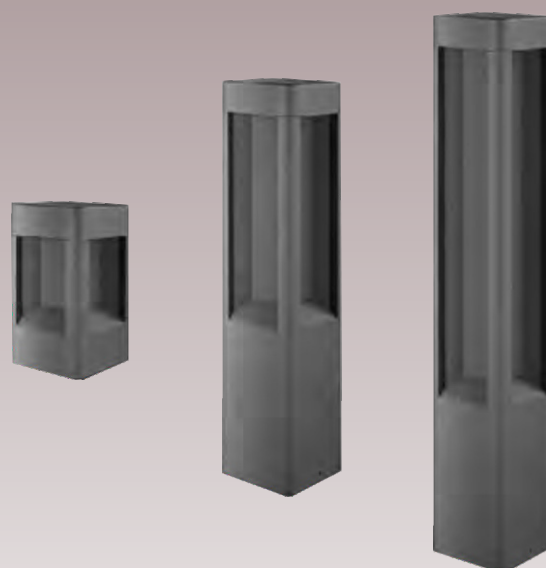

284609 / 284709 / 284809

Description

Material - Die cast aluminium extruded sections with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Polycarbonate diffuser, UV stabilized with a better light output.

Mounting - LED Surface mounted.

Standards - Manufactured and tested as per PTPS IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective

This luminaire is characterized as one of the innovative in the LED technology. Through Innovation and research this luminaire becomes more efficient and durable. It gives pleasant and comfortable to ones eye. LED energy consumption savings.

Completely dustproof.

Protected against jets of water.

Obbiettivo

Questo apparecchio è caratterizzato come uno degli innovativi nella tecnologia LED. Attraverso l'innovazione e la ricerca, questo apparecchio diventa più efficiente e durevole. Dà piacevole e confortevole per gli occhi. Risparmio sui consumi energetici a LED.


Completamente antipolvere.

Protetto contro i getti d'acqua.

	CODE	POWER	TYPE	IP	LUMENS	DIMENSION
	284609	9W	SMD	65	90 lm/W	120 x 260 x 500mm
	284709	9W	SMD	65	90 lm/W	120 x 260 x 800mm
	284809	9W	SMD	65	90 lm/W	170 x 100 x 200mm

Color Options

SG DG B



2700K
3000K
4000K
5000K
6000K



IK08

CRI >90

-20° C
55° C

85~265V
50/60Hz

leggero
PHILIPS

BRIDGELUX
CREE

A++