



285102

285202

285302 / 285402

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Tempered glass diffuser, UV stabilized with a better light output.

Reflector - Aluminium reflector, UV stabilized.

Type - LED Outdoor.

Standards - Manufactured and tested as per PTPS IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).


Objective

This light delivers excellent performance and outstanding fitting durability. This is very suitable in private gardens, public parks and etc. Also, this have a unique design and will be fitted everywhere in external areas. Completely dustproof. Protected against high pressure water jets.



Obbiettivo

Questa luce offre prestazioni eccellenti e una straordinaria durata nel montaggio. Questo è molto adatto in giardini privati, parchi pubblici ed ecc. Inoltre, questo ha un design unico e verrà montato ovunque nelle aree esterne. Completamente antipolvere. Protetto contro i getti d'acqua ad alta pressione.

	CODE	POWER	TYPE	IP	LUMENS	DIMENSION
	285102	4*2.5W	SMD	65	90 lm/W	90 x 380mm
	285202	8*2.5W	SMD	65	90 lm/W	150 x 380mm
	285302	8*2.5W	SMD	65	90 lm/W	186 x 520mm
	285402	14*2.5W	SMD	65	90 lm/W	186 x 950mm

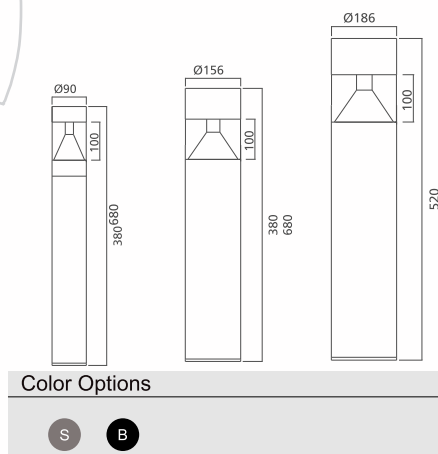

Beam Angle



2700K
3000K
4000K
5000K
6000K



IK08

CRI >90

-20° C
55° C

85~265V
50/60Hz

leggero
PHILIPS

LED Chips
BRIDGELUX
CREE

A++