



285912 / 20 / 30 / 42



286042

Objective

A modern luminaire with advance LED technology. This luminaire gives pleasant, calm and bright light effect to the environment. This luminaire guaranteed to be a high quality and developed through innovation of luminaires. Very suitable for Streets, garden park, walkway, Bus Stop and etc. Completely dustproof. Protected against high pressure water jets.

Obbiettivo

Un apparecchio moderno con tecnologia LED avanzata. Questo apparecchio d'illuminazione conferisce all'ambiente un effetto di luce piacevole, calmo e luminoso. Questo apparecchio è garantito per essere di alta qualità e sviluppato attraverso l'innovazione degli apparecchi di illuminazione. Completamente antipolvere. Protetto contro i getti d'acqua ad alta pressione.

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.


Diffuser - Tempered glass diffuser, UV stabilized with a better light output.

Reflector - Optical Lens, UV stabilized.

Standards - Manufactured and tested as per PTPS IEC 62722.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 50,000 Hrs Life span under temperature (-20°C to 55°C).

	CODE	POWER	TYPE	IP	LUMENS	DIMENSION
	285912	1*12W	SMD	65	90 lm/W	180 x 180 x 1000mm
	285920	1*20W	SMD	65	90 lm/W	180 x 180 x 1000mm
	285930	1*30W	SMD	65	90 lm/W	180 x 180 x 1000mm
	285942	1*42W	SMD	65	90 lm/W	180 x 180 x 1000mm
	286042	1*42W	SMD	65	90 lm/W	180 x 180 x 4000mm/3000mm


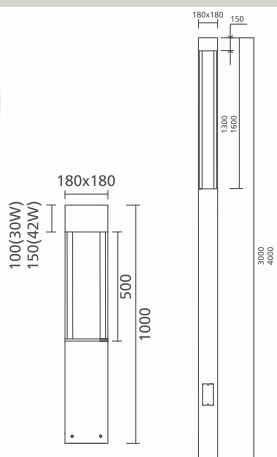


Color Options

S

B

Beam Angle



2700K
3000K
4000K
5000K
6000K



IK08

CRI >90

-20° C
55° C

85~265V
50/60Hz

leggero
PHILIPS

LED Chips
BRIDGELUX
CREE

