



119906



119912

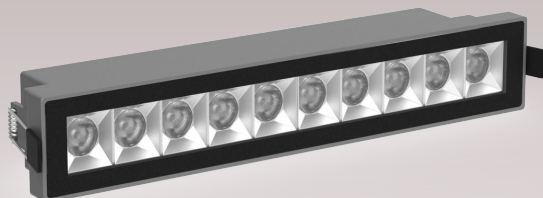

119924

Description

Housing - Die cast aluminium powder coated with choice of RAL colors. radiation protection, UV with high mechanical resistance.

Diffuser - Tempered glass diffuser.
UV stabilized with a better light output.

Mounting - LED Recessed mounted.

Standards - Manufactured in accordance with IEC 62722.

LED - Energy saving consumption and Durability.
Efficiency and quality in wide variation.
50,000 Hrs Life span under temperature (-20°C to 55°C).

Objective


The high definition optics, meticulously studied and made of metallised highly resistant thermoplastic material, and the integrated black anti-glare screen are the warranty of a really professional light effect: pure, uniform and highly visual comfortable. Suitable in false ceiling, with the body in die cast aluminium which gives to the product that look of tough and professional at the same time, the luminaire is pure efficiency.

Completely dustproof.
Protected against jets of water.




Obbiettivo

Le ottiche ad alta definizione, meticolosamente studiate e realizzate in materiale termoplastico altamente resistente metallizzato, e lo schermo antiriflesso nero integrato sono la garanzia di un effetto luce davvero professionale: puro, uniforme e molto confortevole. Adatto al controsoffitto, con il corpo in alluminio pressofuso che conferisce al prodotto un aspetto dall'aspetto tenace e professionale allo stesso tempo, l'apparecchio d'illuminazione è di pura efficienza.

Completamente antipolvere.
Protetto contro i getti d'acqua.

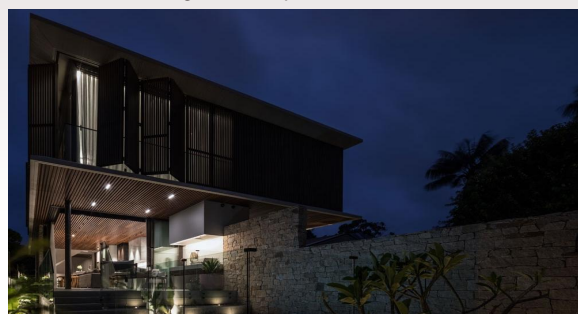



CODE	POWER	CHIP	IP	LUMENS	DIMENSION
119906	6W	SMD	65	85 lm/W	108 x 43.5 x 66mm
119912	12W	SMD	65	85 lm/W	148 x 43.5 x 66mm
119924	24W	SMD	65	85 lm/W	283 x 43.5 x 66mm



Color Options



Beam Angle

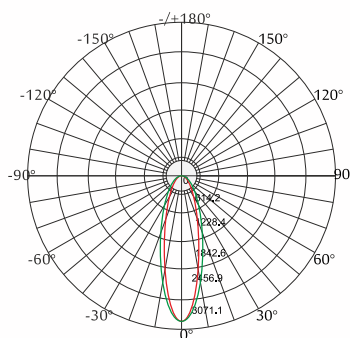

2700K
3000K
4000K
5000K
6000K

