



163410 / 12

Description

Housing - Die cast aluminium powder coated with choice of RAL colors, radiation protection, UV with high mechanical resistance.

Diffuser - Tempered glass diffuser, UV stabilized with a better light output.

Type - LED Surface mounted.

Standards - Manufactured and tested as per EN 60598-1 and 60598-2-1.

LED - Energy saving consumption and Durability. Efficiency and quality in wide variation. 60,000 Hrs Life span under temperature (-40°C to 50°C).




Objective

This Surface LED Linear is simple and yet have very pleasant and warm output. It is exclusively designed for the architect and designer with imagination and personal style. This surface linear LED ceiling light fixture can be installed easily. Durability and energy consumption is expected on this luminaire. Completely dustproof. Protected against jets of water

Obbiettivo

Questo Surface LED lineare è semplice e tuttavia ha una resa molto piacevole e calda. È progettato esclusivamente per architetto e designer con fantasia e stile personale. Questa plafoniera lineare da superficie a LED può essere installata facilmente. Durata e consumo di energia previsti per questo apparecchio. Completamente an polvere Prote o contro getti d'acqua.

		CODE	POWER		IP	LUMENS	DIMENSION (L x W x H)
		 163410	10W	SMD	65	100 lm/W	1000 x 16 x 29.8mm
		 163412	12W	SMD	65	100 lm/W	1000 x 16 x 29.8mm

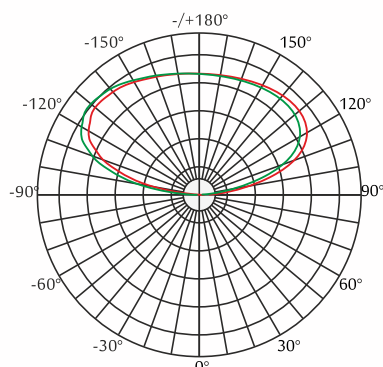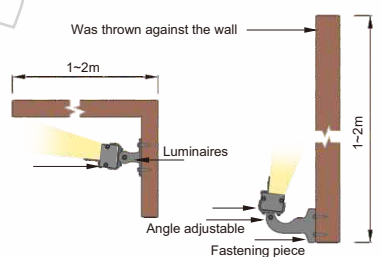

2700K
3000K
4000K
5000K
6000K

DALI
1-10 Dimming
DMX